



SOLUTION ENABLEMENT

GDSN Receiver

2024.2 – June 2024

Table of Contents

Table of Contents	2
GDSN Receiver Solution Enablement	3
Configuring the GDSN Receiver	3
Prerequisites	3
Easy setup	4
Context languages	4
Target Markets	4
Global Location Number (GLN)	5
GDSN Datapool Receiver Root	6
Workflows	7
Downstream Workflow	7
Message Response Workflow	8
Hierarchy Withdrawal Workflow	9
CIC handling	10

GDSN Receiver Solution Enablement

The GDSN Receiver can interact with any GDSN datapool which is capable of sending and receiving XML files in the standard GS1 XSD schema machine - to - machine. The GDSN Receiver Solution acts as a repository to store all received products and full GS1 attribution. The system provides the framework for automating CIC responses and framework for transforming the GS1 data model to meet the needs of PMDM and other downstream systems.

The GDSN Receiver Solution:

- is a solution which runs in a separate STEP instance.
- stores full attribution received from GDSN.
- allows specified attributions to flow to PMDM, with the ability to expand attribute sets as requirements change.
- allows full attribute mapping for inbound CINs.
- incorporates Web UI for managing GDSN admin tasks.
- allows built-in workflows to manage messaging, MDM data flow, and Hierarchy Withdrawals.
- includes completeness rules that can be maintained in Web UI.
- contains GPC validations that can be maintained in Web UI.
- is a framework for transforming GDSN data model to match downstream systems, automating the CIC response, and adding more complex rules.
- contains transformation tables for Attribute IDs, LOVs, object types, reference types, and unit descriptors.
- includes an XSLT post-processor.

Configuring the GDSN Receiver

Prerequisites

GDSN Receiver performance has been optimized to receive 50,000 CIN files daily (on SaaS v2 systems).

To enable the GDSN Receiver solution, several configuration properties need to be set.

```
Standalone.JVMArgs.Add,GDSN=-Dconfigupdateinterval=600000
GDSN2.QueueDeletedProducts=true
GDSN2.Receiver.DirectoryMonitor.MaxNumberOfFilesInMessage=1000
BackgroundProcess.Queue.BMSReceiverInboundQueue.Parallel=16
BackgroundProcess.Queue.GDSNReceiverGarbageCollector.Parallel=4
```

Note: The `BackgroundProcess.Queue.BMSReceiverInboundQueue.Parallel` property can be increased to 32 or 64 based on system capacity.

This solution allows you to run either a 'multithreaded solution' or a 'single threaded solution'. If you want to switch over to a single threaded solution then make sure to switch off the property, as follows:

```
GDSN2.QueueDeletedProducts=false
```

Note: For SaaS systems, properties are set within the Self-Service UI by going to the Configuration Properties tab for your system. If the properties you need are not shown, submit an issue within the Stibo Systems Service Portal to complete the configuration. For on-prem systems, properties shown in this topic should be added to the sharedconfig.properties file.

Easy setup

The GDSN easy setup requires GTIN-14 based values for the GTIN attribute.

There is also a an event processor (GDS_NodeDeleteQueue) that is installed automatically with the easy setup that must be enabled.

Context languages

Context languages must be configured to include all languages that are intended to be captured from incoming GDSN data. Any GDSN data received in a language that is not configured will be skipped during CIN import.

In this example, the user has created six different contexts, one of which (ID=Context1) is the master context.

System Setup

Attribute Groups

Attribute Transformations

Action Sets

Contexts

Language

Country

Lists of Values / LOVs

Change Package

Completeness Metrics

Event Processors

Gateway Integration Endpoints

GDSN Status Business Actions

Global Business Rules

<

Contexts

Log

Contexts

ID	Name	Purpose	Locale	Language	Country
> GDSN01	GDSN Dutch NL		Dutch - nl	German NL	Netherlands
> GDSN04	GDSN English NL		English - en	English NL	Netherlands
> GDSN05	GDSN French FR		French (France) - fr_FR	French FR	France
> GDSN02	GDSN French NL		French - fr	French NL	Netherlands
> GDSN03	GDSN German NL		German - de	Dutch NL	Netherlands
> Context1	Master			English US	Country Root
> Add New Context					

Note: When creating contexts, If more than four contexts are required, it is recommended to continue using the ID format GDSN01, GDSN02, etc., as shown in the image above.

For more information on creating and maintaining contexts, refer to the **Contexts** topic in the **Dimensions and Contexts** documentation.

Target Markets

Context countries must be configured to include any Target Markets used in current or future subscriptions. The 'Target Market Code' must be set to the three digit numeric country code as defined by ISO 3166. For the current list of numeric country codes, refer to the ISO Online Browsing Platform (OBP).

Tree

- Assets
- Configurations
- GDSN Bulk Update Configurations
- GDSN Transformations
- Global Product Classification
- GDSN Receiver
 - Datapool
 - CICs
 - Datapool Format
 - Provider GLNs
 - Receiver GLNs
 - RFCINs
 - Subscriptions
 - Target Markets
 - France
 - Netherlands

No Title

GDSN Target Market
References
Referenced By
Status
State Log
Tasks

Description

Name	>	Value
ID		France_TM
Name		France
Object Type		GDSN Receiver Target Market
Revision		0.1 Last edited by STEPSYS on Tue Oct 29 21:16:28 CET 2019
Path		Entity hierarchy root/GDSN Receiver/Datapool/Target Markets/France
Target Market Code	abc	250

Contexts

Context name	>	Language code
GDSN French FR		fr
Add		

Add contexts and language codes to the Target Markets. Note that it is possible for multiple language codes to apply to a single context.

Tree

- Assets
- Configurations
- GDSN Bulk Update Configurations
- GDSN Transformations
- Global Product Classification
- GDSN Receiver
 - Datapool
 - CICs
 - Datapool Format
 - Subscriptions
 - Target Markets
 - France

No Title

GDSN Target Market
References
Referenced By
Status
State Log
Tasks

Description

Contexts

Context name	>	Language code
GDSN French FR		fr
Add		

Language codes are defined by ISO 639-2. For the current list of language codes, refer to the Library of Congress language code standards.

Global Location Number (GLN)

The GLN must be added to the GDSN Receiver GLN object. This GLN will be used for sending and receiving GDSN messages and must match the GLN that providers will use for publications.

Tree

- Assets
- Configurations
- GDSN Bulk Update Configurations
- GDSN Transformations
- Global Product Classification
- GDSN Receiver
 - Datapool
 - CICs
 - Datapool Format
 - Provider GLNs
 - Receiver GLNs
 - My Company

My Company re

GDSN Receiver GLN
References
Referenced By
Status
State Log
Tasks

Description
Name > > Value

ID	Sys8710871000000
Name	My Company
Object Type	GDSN Receiver GLN
Revision	0.4 Last edited by STEPSYS on Fri Mar 13 17:40:12 CET 2020
Path	Entity hierarchy root/GDSN Receiver/Datapool/Receiver GLNs/My Company
GLN	GLN 1100001008643

GDSN Datapool Receiver Root

There are several values that need to be input into the GDSN Datapool Receiver Root tab during configuration.

Tree

- Assets
- Configurations
- GDSN Bulk Update Configurations
- GDSN Transformations
- Global Product Classification
- GDSN Receiver
 - Datapool
 - ITM GDSN Receiver
 - iTrade Receiver
 - Primary Product Hierarchy
 - Collections
 - eCatalogs
 - Recycle Bin

No Title

GDSN Datapool Receiver Root
References
Referenced By
Status
State Log
Tasks

Description
Name > > Value

ID	DatapoolBMS_01
Name	Datapool
Object Type	GDSN Datapool Receiver Root
Revision	0.9 Last edited by STEPSYS on Tue Oct 29 21:26:54 CET 2019
Path	Entity hierarchy root/GDSN Receiver/Datapool
Datapool GLN	abc 8380160030003
Receiver AS2 Hotfolder In	abc //presalegdsn-app/workarea/GDSN/IN
Receiver AS2 Hotfolder Out	abc //presalegdsn-app/workarea/GDSN/Datapool OUT
Receiver Datapool UserName	abc

Untitled (GDSNDatapool.ReceiverGLNs.Flipper)

GLN	GLN Name
1100001008643	My Company
Add	

- **Datapool GLN:** The GLN of the datapool the user is subscribed to.
- **Define AS2 Hotfolder In** – The folder the IIEP will monitor for incoming GDSN messages from the datapool.
- **Define AS2 Hotfolder Out** – The folder the OIEP will place the outbound GDSN messages that will be sent to the datapool.
- **Define Datapool Username** – User name if required by the datapool. If no user name is provided, this can be left blank.
- **GLN** – User's Global Location Number.

Important: SaaS customers can utilize the GDSN Receiver securely with an AS2 connection. Open an issue (i.e., ticket) in the Stibo Systems Service Portal if you would like to have this connection set up. SaaS Operations and Technical Services will reach out to get the specific information needed to complete the configuration.

Note: Event processors and endpoints must be enabled and scheduled before processing any inbound or outbound GDSN messages. For more information on endpoints, refer to the **Data Exchange** topic. For more information on event processors, refer to the **Event Processors** topic.

Providers can be added to the system manually in the Web UI or imported into STEP Workbench. If migrating many existing providers, it is recommended to use an import. Following is an example of a STEPXML import:

```
<STEP-ProductInformation ContextID="GDSN01" WorkspaceID="Main"
UseContextLocale="false">
<Entities>
<Entity ID="1234567890123" UserTypeID="GDSNProviderGLN" ParentID="DatapoolBMS_
01ProviderGLNs">
<Name>My Provider</Name>
<Values>
<Value AttributeID="GLNIdentifier">1234567890123</Value>
<Value AttributeID="InformationProviderName_GDS">My Provider</Value>
</Values>
</Entity>
</Entities>
</STEP-ProductInformation>
```

Workflows


Downstream Workflow

The downstream workflow is configured to:

- determine which products will be sent downstream via the **GDS_GDSNToMDMOutbound** endpoint.
- wait for a response from the downstream system for all necessary levels of the hierarchy.
- trigger a CIC message back to the provider based on customizable logic.


To add logic for restricting certain products from being sent downstream, the function **sendItemToMDMOutbound** within library GDS_CustomerAutomatedValidationLibrary can be edited.

Note: Default logic always returns 'True' result (all products will be sent).

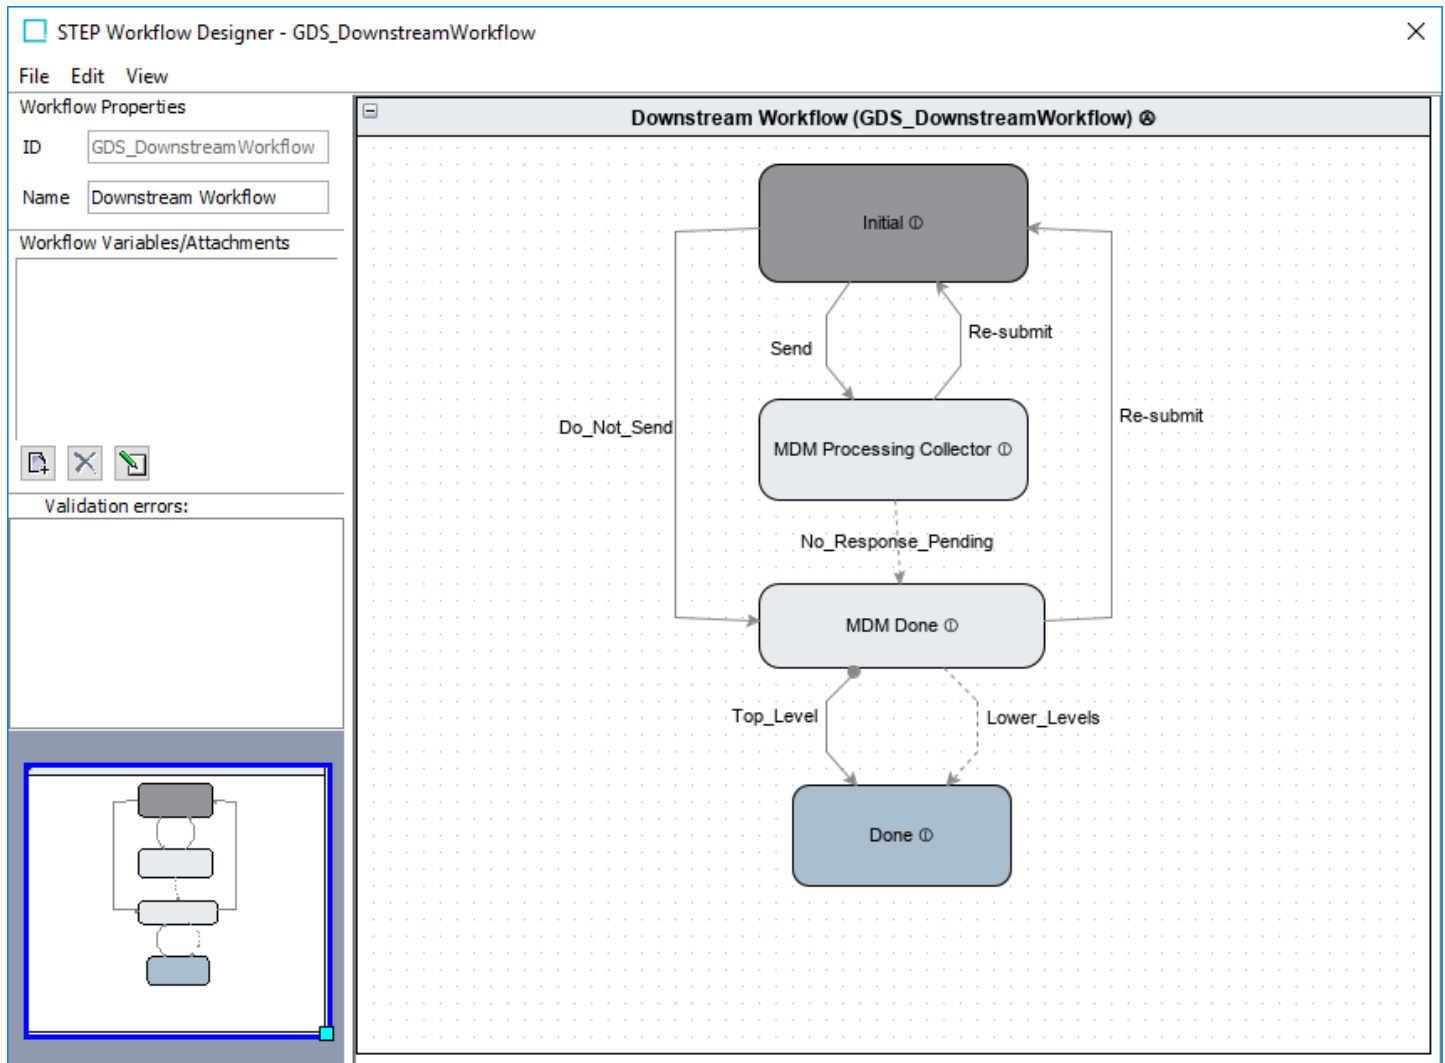


Message Response Workflow

For messages sent to a GDSN datapool, a response back is expected confirming it has been received. To ensure there is no loss of connectivity between the systems, the Message Response Workflow is used to track messages that have not received a response. The escalation timer on the Message Response Pending state defaults to one hour. The timer and notification can be customized based on needs.

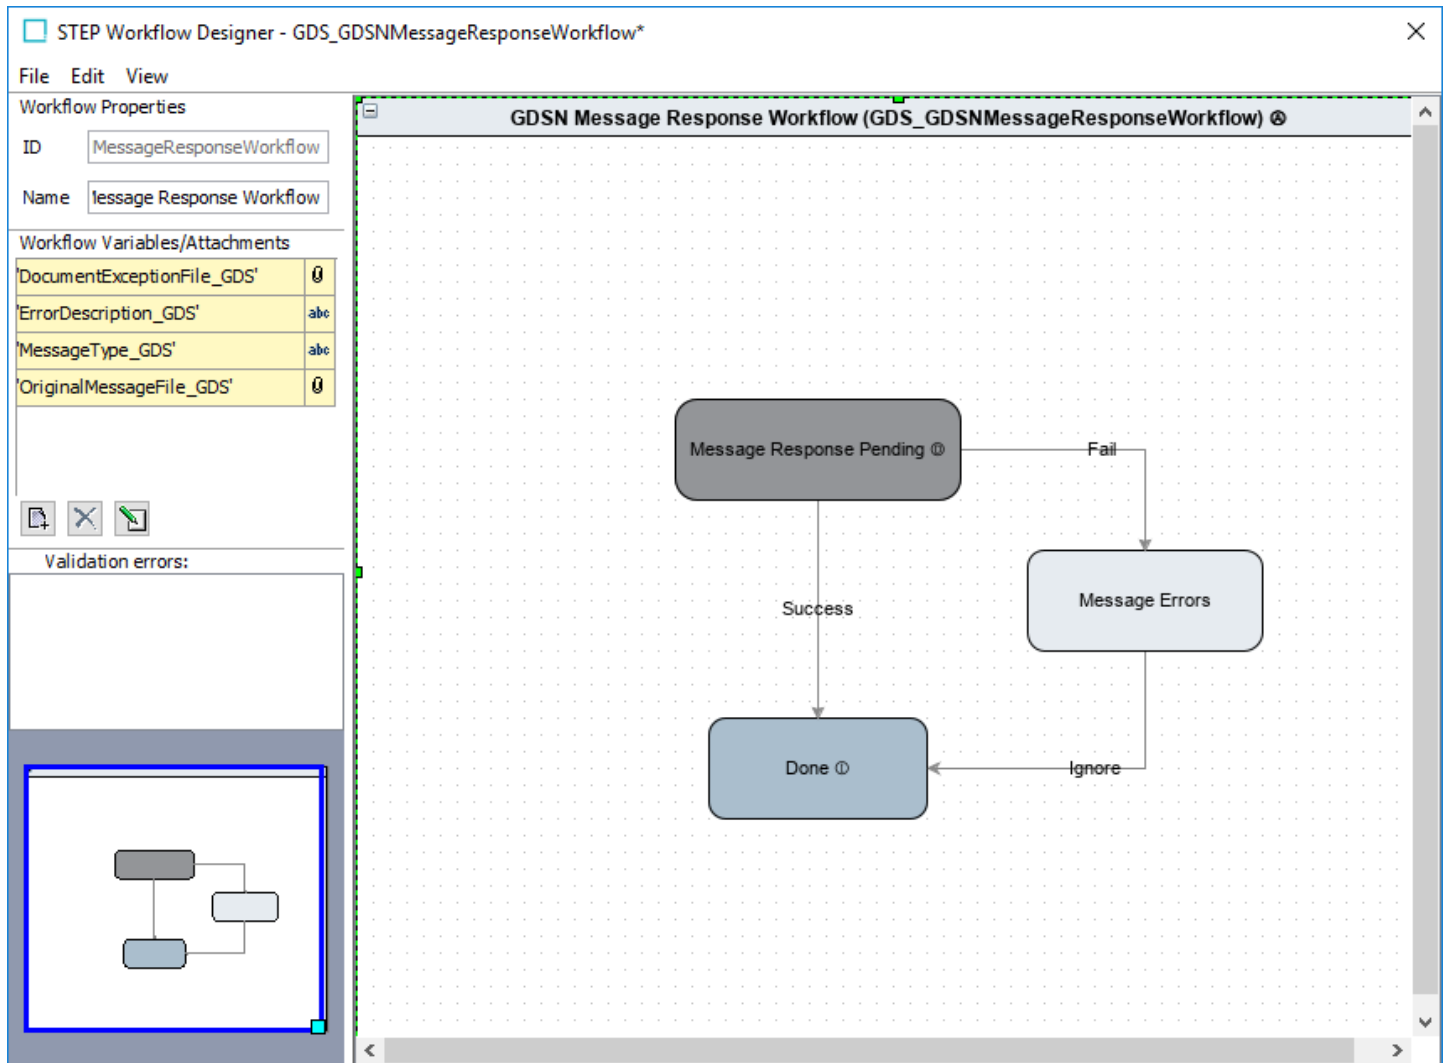

Hierarchy Withdrawal Workflow

Providers can send a **CatalogueItemHierarchicalWithdrawal** message to delete a publication, sometimes only temporarily while making necessary changes to the hierarchy. To prevent the temporary withdrawals from getting sent downstream unnecessarily, the Hierarchy Withdrawal Workflow exists to track how long the products have been withdrawn and prevent submission through the Downstream Workflow. By default, the escalation timer is set to 48 hours. This can be adjusted as needed.

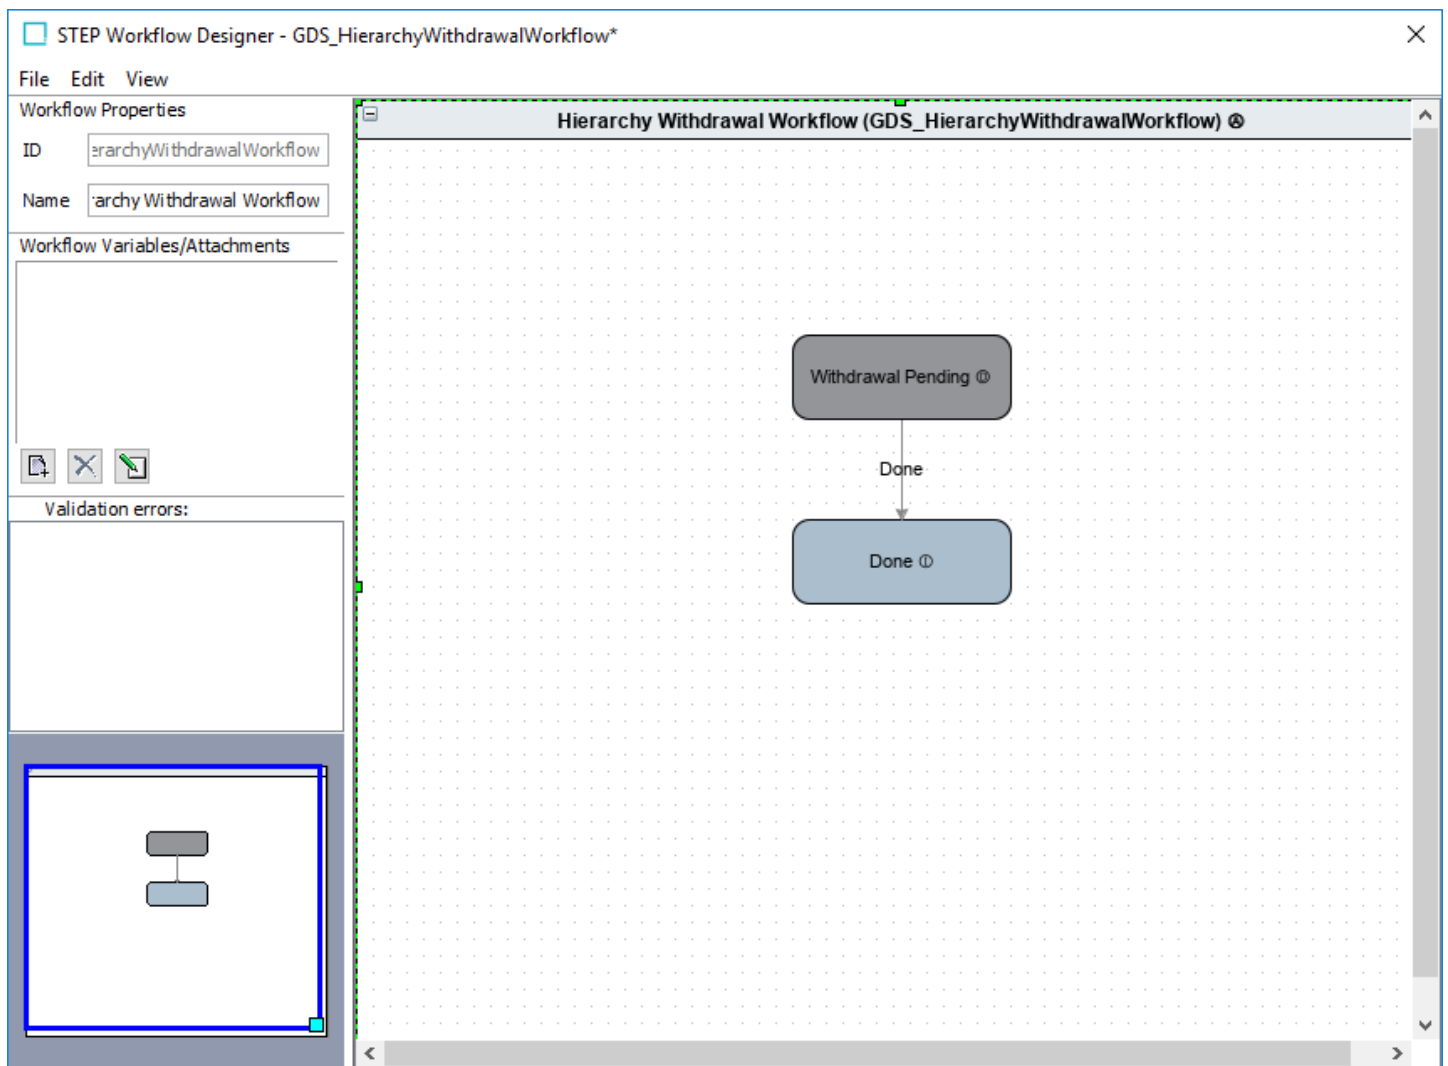

For more information on workflows, refer to the **Getting Started with STEP Workflows** topic in the **Workflows** documentation.

CIC handling

In GDSN, the CIC message is used to communicate the internal status of a product hierarchy back to the provider. Possible CIC statuses include Received, Reject, Review, and Synchronize:

- **Received:** Notifies the provider that the product has been received.
- **Reject:** Indicates that the recipient is not interested in the product. All synchronization is terminated.
- **Review:** Sends a request for the revision of the product to the provider because the data cannot be synchronized.
- **Synchronize:** Notifies the provider that the received data has been synchronized with the recipient's system.

To facilitate this process, the Downstream Workflow will automatically trigger a 'Received' CIC message if it is the first time receiving the product hierarchy. If a CIC status already exists, no 'Received' CIC message will be sent.

Products sent downstream will remain in the workflow pending an API call from the downstream system including a command from the CIC status list (Received, Reject, Review, Synchronize).

If the Review CIC status message is returned, the necessary instructions needed for any needed corrections should also be included for the provider.

The **MDMtoGDSN** function can be updated for customized logic. The default logic is:

- **Reject** will immediately find all hierarchies the product belongs to and trigger a Reject CIC for each hierarchy.
- **Review** will trigger a Review CIC once entire hierarchy has gotten an MDM response and none of the responses contain Reject.
- **Synchronize** will trigger a Synchronize CIC once entire hierarchy has gotten an MDM response and none of the responses contain Reject or Review CIC statuses.