



USER GUIDE

Administration Portal

2025.3 - September 2025



Table of Contents

Table of Contents	2	Logs	25
Administration Portal	4	Log Types	26
Accessing the Admin Portal	5	Logs	26
Prerequisites	5	Trace	26
Access	6	JS Logs	26
Timeout	8	GC Logs	27
Activity	9	SPOT Logs	27
Query Parameters and Accessing Data	9	Message-Streaming Logs	28
Chart Data	10	Viewing Options	28
Details Data	11	IDS Logging	29
Services	11	Viewing and Downloading Logs	29
SQL	11	Downloading and Uploading Configurations	29
Current Thread	12	Configuring DTP Log File Settings	30
Queues	12	Error Handling	31
Memory	12	Monitoring	32
System Information	13	Network	32
Download / Upload	14	Event Queue Content	32
Activity Dashboards	15	Additional Links	33
Default Reporting	15	External Monitoring	34
Ad Hoc Queries	18	Sidecars Monitoring	35
User Activity	19	Sensors for External Monitoring	38
Generating a User Activity Report	19	Configuration	52
Considerations	23	Configuration properties to identify system name and environment	53
		Thread Dump	57

Tools	58	Deploying the Resource Files	77
Business Rule Tracing	58	Properties To Be Set	78
Links	59	Limitations	79
System Software Snapshot	59	End User Access of Translated STEP Workbench UIs	79
Http Authentication Test Tool Servlet	60		
Diagnostic Tools	60	Setup and User Access of Translated Web UIs ..	80
Profiler	61	Backward Compatibility	82
Healthcheck	61	Login Screen Dropdown Locale	83
Running Healthchecks	63	Select Locale via the Global Navigation Panel ..	84
Healthcheck Results	64		
Send Diagnostics	67		
Localization	69		
Localization Frameworks	69		
Key-based framework for Web UI	69		
Localizing text for React-based components	71		
Key-based framework for STEP Workbench ..	72		
Annotation-based localization framework	72		
Localization Tool	74		
Overview of the Tool	74		
Generate Translation File	75		
Target Language	75		
Country	75		
Translation Status	76		
Convert Translation File	77		

Administration Portal

The Administration Portal (commonly referred to as the admin portal) provides a number of useful tools, enabling administrators to support STEP without physical access to the system. Some functions available within the admin portal are useful only for Stibo Systems Technical Support and/or R&D groups, while others are applicable for any system administrators. Specifically, the admin portal allows administrators to:

- View and download information about the system, including activities and processes being performed on the STEP application and their impact on the server(s) via the Activity tab
- View the amount and types of requests made to the system, and how long it takes for the requests to be answered, via the Activity Dashboards tab
- View the number of active and inactive users within a specified time period
- View and download system logs via the Logs tab
- View and download InDesign Renderer logs, and download and upload log configurations
- Monitor servers, events, and components via the Monitoring tab, including providing data for external monitoring systems
- View the system properties configurations (e.g., the properties and values in the system properties files) via the Configuration tab. For Stibo Systems SaaS environments, relevant configuration properties can be viewed and modified via the Self-Service UI.
- Trace business rules, compare system configurations, generate a system snapshot, and test user authentication via the Tools tab
- Perform healthchecks for common system issues via the Healthcheck tab
- Send diagnostics and healthcheck information to Stibo Systems via the Send Diagnostics tab
- Extract static texts for localization of interfaces and import translations via the Localization tab

This guide describes how to access the admin portal, as well as detailing the uses and available functions of the tools that are useful for administrators outside of Stibo Systems.

Accessing the Admin Portal


This topic describes how to access the admin portal, including what privileges are required to do so. It also covers how to define the number of minutes that the admin portal is allowed to be idle before timing out and revoking any credentials granted to the current portal user.

Prerequisites

To access the admin portal, the person attempting to log in must have a user created in STEP that is a member of a user group with privileges that include the following setup actions:

- View Administration
- View Context

For example, user 'admin1' is part of the 'AdminPortal' user group.

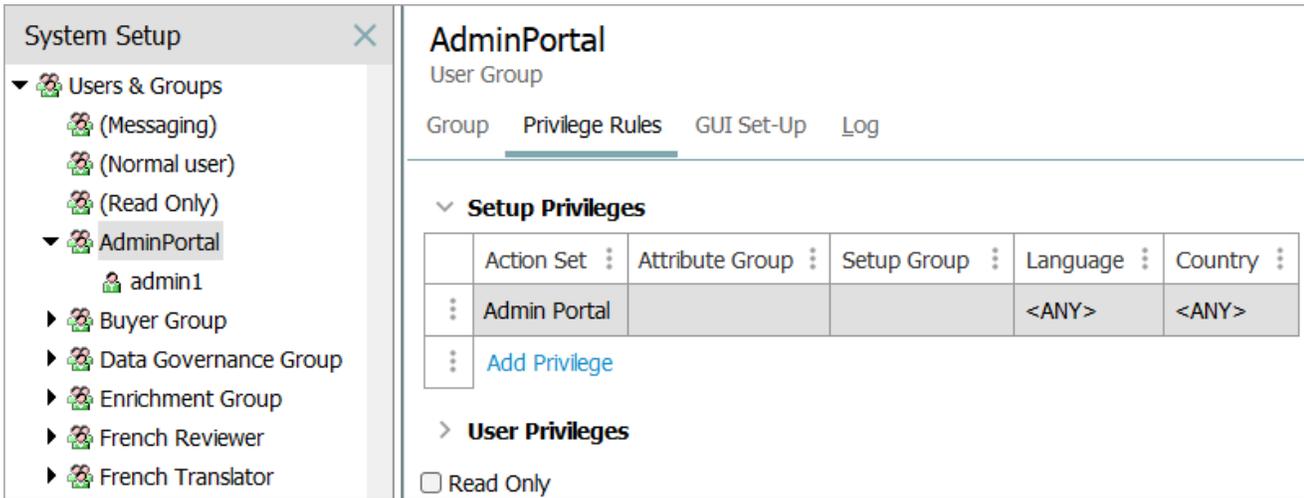

The screenshot shows the 'AdminPortal' configuration page. On the left is a 'System Setup' sidebar with a tree view containing 'Users & Groups' and 'AdminPortal' (selected). The 'AdminPortal' group contains a user named 'admin1'. The main panel shows the 'AdminPortal' configuration with tabs for 'Group', 'Privilege Rules', 'GUI Set-Up', and 'Log'. The 'Privilege Rules' tab is active, displaying a table of 'Setup Privileges'.

	Action Set	Attribute Group	Setup Group	Language	Country
	Admin Portal			<ANY>	<ANY>
	Add Privilege				

Below the table, there is a section for 'User Privileges' with a 'Read Only' checkbox.

The 'Admin Portal' setup action set includes the required actions.

System Setup ✕

- ▶ Attribute Groups
- ▶ Attribute Transformations
- ▼ Action Sets
 - ▼ Setup Actions
 - (Create values in medium domain)
 - (Maintain domain values)
 - (Translate attributes)
 - Admin Portal**

Admin Portal

Action Set Log

▼ **Description**

	Name			Value	
⋮	ID			Admin Portal	
⋮	Name			Admin Portal	
⋮	Action Type			Setup Action	

▼ **Actions**


	Actions	⋮
⋮	View Administration	
⋮	View context	
⋮	Add Action	

Additional information on Actions, Users, and User Groups can be found in the System Setup documentation, under Action Sets and Users and Groups, respectively.


Access

The admin portal can be accessed by:

- Typing the appropriate URL into any browser: [server name]/adminportal
- Clicking the **System Administration** link from the Resources section of the Start Page

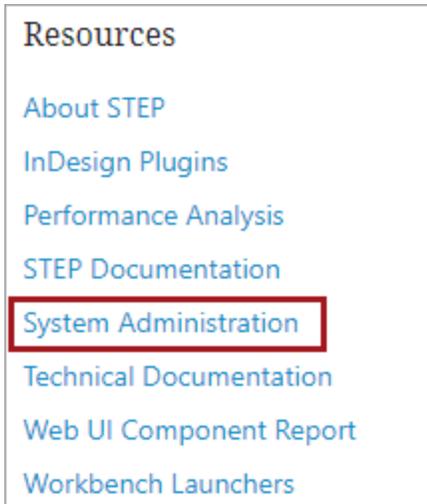

Either access method displays a login prompt:

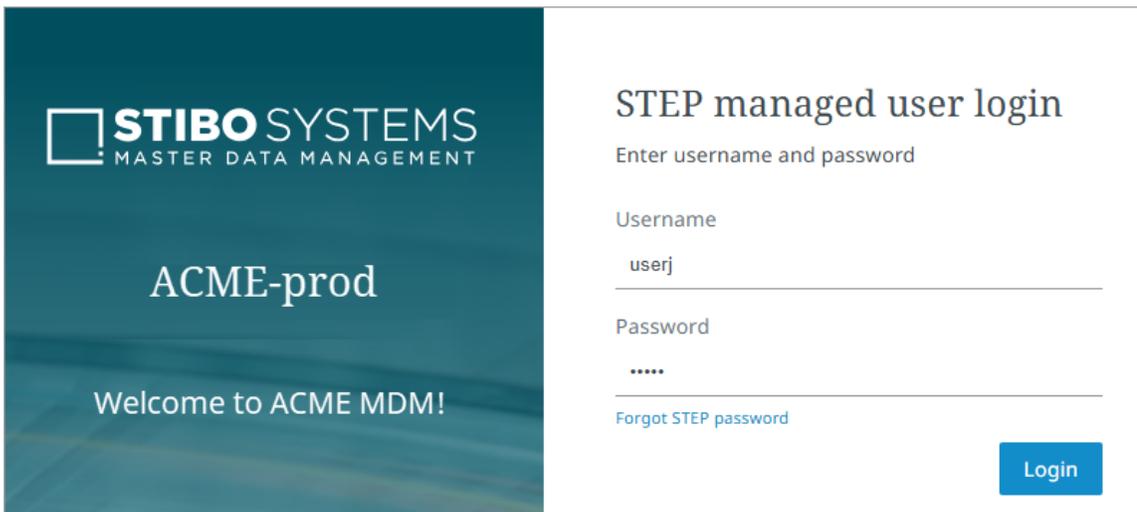

Valid credentials must be entered for login, as indicated in the Prerequisites section of this topic. Once logged in, the admin portal displayed a series of tabs, with various functions available on each tab. The remainder of this guide provides details on these tabs and functions.

Timeout

Note: The following functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.


By default, the `Portal.Timeout` configuration property determines that the admin portal can remain idle for 15 minutes before timing out. Upon time out, all credentials granted to the current portal user are revoked until the next log in. This property is also used for the timeout of Web UIs. If required, submit a ticket to the Stibo Systems Service Portal to change the default setting.

For example, when the property has a value of 30, the portal can remain idle for 30 minutes before logging the current user out.

Note: The 'Inactivity timeout period' option setting overrides the `Portal.Timeout` configuration property. For details, refer to the Security Policy topic in the 'Users and Groups' section of the System Setup documentation.

Activity

The Activity tab is the first tab in the admin portal and provides information about the STEP application and application servers without having to log in to any server directly. This allows users to monitor the information about the activities and processes being performed on the STEP application and their impact on the server(s). A variety of information is available that is valuable for general monitoring purposes and/or troubleshooting.

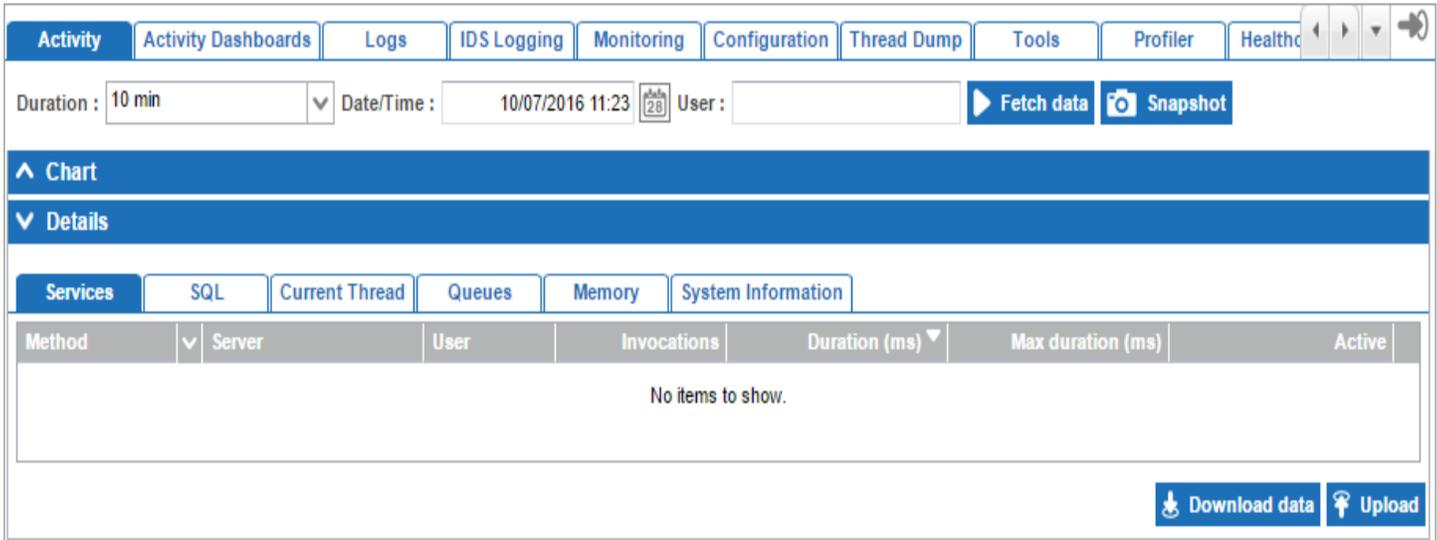


The screenshot shows the 'Activity' tab selected in the top navigation bar. Below the navigation bar, there are filter options for 'Duration' (set to 10 min), 'Date/Time' (10/07/2016 11:23), and 'User'. There are 'Fetch data' and 'Snapshot' buttons. Below these are sections for 'Chart' (expanded) and 'Details' (collapsed). Under 'Details', there are sub-tabs for 'Services', 'SQL', 'Current Thread', 'Queues', 'Memory', and 'System Information'. A table is displayed with columns: Method, Server, User, Invocations, Duration (ms), Max duration (ms), and Active. The table contains the text 'No items to show.' At the bottom right, there are 'Download data' and 'Upload' buttons.

The information is divided into Chart and Details sections, and displays neither by default. This topic addresses how to access data for the tab, as well as providing descriptions for the information that is available via this interface.

Query Parameters and Accessing Data

Before gathering data for the tab, it is important to consider what information is required, and to use the provided parameters to specify this. Once the query parameters have been specified, the **Fetch data** and **Snapshot** buttons can be used to access the information from the system.

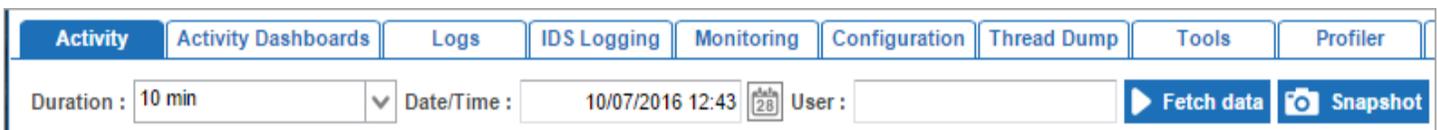

This screenshot is similar to the previous one, but the 'Date/Time' filter is now set to 10/07/2016 12:43. The 'Fetch data' and 'Snapshot' buttons are still visible.

Duration: Required parameter to specify the duration of the of time for which activity should be displayed, ending at the time indicated in the Date/Time parameter. Using the above screenshots as an example, data will be displayed for the 12:33 - 12:43 time period.

Note: If 2 or 4 hours is selected for the display, the Details data described below are unavailable and data will only be displayed in the Charts section.

Date/Time: Required parameter to specify the end of the time period for which activity should be displayed. The parameter can be edited using the date picker icon to the right of the field, or by typing in the field directly using the format MM/DD/YYYY HH:mm.

User: Optional parameter used to restrict the displayed data to only that of a single user. If used, the STEP ID of the desired user should be typed directly into the field. If left blank, data for all users will be displayed.

Fetch Data: Data is regularly sent to the application server(s) for profiling, and can be accessed at [STEPHOME]/diag/profiling (e.g., opt/stibo/step/diag/profiling). Clicking Fetch Data collects all profiling data that has been sent previously that meets the criteria defined by the Duration, Date/Time, and User parameters and displays it to the user within the admin portal for viewing and analysis.

Snapshot: Invokes a manual sending of profile data to the application server(s), specific to the time at which the snapshot is requested (e.g., NOT subject to the Duration, Date/Time, or User parameters). This creates a .ZIP file that on the application server at [STEPHOME]/diag/profiling (e.g., opt/stibo/step/diag/profiling). This can be used when the user needs to collect data to send to Stibo Systems Support to assist in system analysis and troubleshooting. However, it is preferred that the Send Diagnostics feature be used in place of this to ensure that the complete set of relevant information is sent. Refer to the Send Diagnostics topic for more information.

Chart Data

The Chart section of the interface displays a graphical representation of the data, per the query parameters. CPU, Memory, and Thread usage are displayed, along with buttons to hide the displays if needed.



CPU: Displays the CPU load over time put on the application server by running STEP. It is not reflective of any processes running on the server outside of STEP.

Memory: Displays the percentage of the memory usage (heap) spent over time by the STEP application, in relation to the maximum limit set up for the application sever process.

Threads : Displays the load put on the system over time in terms of concurrent ongoing active threads.

Details Data

When the **Fetch data** action has been used, detailed data is included for system activity, per the provided parameters (Duration, Date/Time, and User). The Details section contains 6 tabs, each of which is described below.

Note: Detailed data is only available when Duration is set to 20 minutes or less.

Services

The Services tab details the profiling information gathered from the systems services, allowing users to drill down into different service calls inside the application. By default, method calls are sorted by duration. Therefore, if users are experiencing performance problems, it is possible to identify long running method calls that could be contributing to the issue. Additionally, this information can be used to determine whether it is core STEP functionality or a custom extension that is contributing to the issue. However, some interpretation of the data is required so this information is typically used only by Stibo Systems Technical Support.

Details						
Services						
Method	Server	User	Invocations	Duration (ms)	Max duration (ms)	Active
com.stibo.service.manager.background.impl.BackgroundManagerRunnableImpl.run(DefaultBackgroundProcessManager)			1	37	37	0
com.stibo.service.manager.background.impl.BackgroundManagerRunnableImpl.run(DefaultBackgroundProcessManager)	doc-dev	unknown		37		0
com.stibo.service.manager.beans.DefaultBackgroundProcessManager.run	doc-dev	unknown		37		0
com.stibo.core.domain.impl.ManagerImpl.executeInternal (impersonate)	doc-dev	DBA		37		0
SQL with name: 'getBackgroundProcessesBy'	doc-dev	DBA		35		0
SQL with name: 'getBackgroundProcessesBy'	doc-dev	unknown		35		0
SQL with name: 'getLOV/allNo'	doc-dev	DBA		1		0
SQL with name: 'getLOV/allNo'	doc-dev	unknown		1		0


SQL

The SQL tab displays the SQL queries that have been executed by the system services. This is similar to the information shown on the Services tab, but reports on the use of SQL queries rather than standard methods. As with the Services tab, these items are also sorted by duration, which can assist in identifying long running queries that could be causing performance issues. However, the information is typically only used by Stibo Systems Technical Support as some interpretation of the data is required.

▼ Details				
Services				
SQL				
SQL	Invocations	Duration (ms)	Max duration (ms)	Active
<div style="border: 1px solid #ccc; padding: 2px;"> <div style="display: flex; justify-content: space-between; align-items: center;"> select n.*... 2 70 35 0 </div> <div style="font-size: 0.8em; padding: 2px;"> <p>2016-08-10 09:51:48.565: Sql made by 'unknown' on server 'doc-dev' 35 0</p> <p>2016-08-10 09:51:48.565: Sql made by 'DBA' on server 'doc-dev' 35 0</p> </div> </div>	2	70	35	0
<div style="border: 1px solid #ccc; padding: 2px;"> <div style="display: flex; justify-content: space-between; align-items: center;"> select v.valno hitno... 2 2 1 0 </div> <div style="font-size: 0.8em; padding: 2px;"> <p>2016-08-10 09:51:48.564: Sql made by 'unknown' on server 'doc-dev' 1 0</p> <p>2016-08-10 09:51:48.564: Sql made by 'DBA' on server 'doc-dev' 1 0</p> </div> </div>	2	2	1	0

[Download data](#)
[Upload](#)

Users may hover on a row to expose the ellipsis button (⋮). When clicked, a Thread Details popup is provided that displays the full SQL statement.

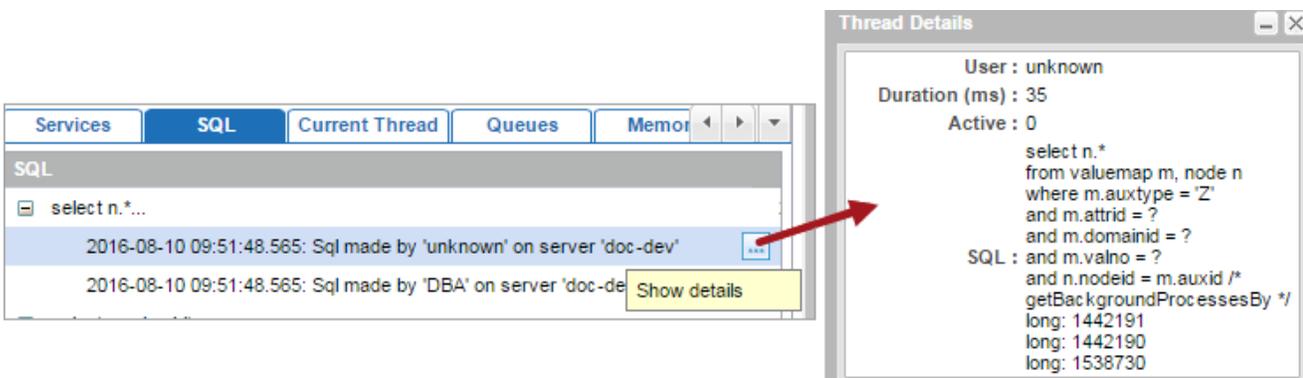

Current Thread

The Current Thread information is recommended exclusively for use by Stibo Systems Technical Support and is therefore not described.

Queues

The Queues information is recommended exclusively for use by Stibo Systems Technical Support and is therefore not described.

Memory

The Memory tab displays statistics for memory usage and garbage collection (GC), which can be useful in troubleshooting performance issues.

▼ Details					
Services	SQL	Current Thread	Queues	Memory	System Information
Parameter	tpm-handover.stibo.corp				
Max used heap size	2023.387 MB				
Min used heap size	371.760 MB				
Average used heap size	1197.573 MB				
Percent of time in GC to total time	0.000 %				
Percent of time in normal GC to total time	0.000 %				
Percent of time in full GC to total time	0.000 %				
Percent of GC time in normal GC	100.000 %				
Percent of GC time in full GC	0.000 %				
Average memory freed	1651.627 MB				
No of normal GCs	1				
No of full GCs	0				
Number of OutOfMemoryError's	0				

Note: Data is only available on this tab if Java Garbage Collection has been run on the system.

System Information


The System Information tab displays basic information about the system being profiled.

▼ Details					
Services	SQL	Current Thread	Queues	Memory	System Information
Parameter (Mon Aug 15 11:52:05 GMT-400 2016)	doc-dev				
No of cores	2				
Average system load for the last minute	3.25				
Average system load per core for the last minute	1.63				
Total physical memory size	3856.00 MB				
Free physical memory size	2756.00 MB				
Usable disk space / Total disk space	[/ = 2 GB / 11 GB]				
Percent of time in GC in last 24h	0.00 %				
Uptime	358775 s				

Note: System information is automatically included in diagnostics packages sent to Stibo Systems. For more information on sending diagnostics, refer to the Send Diagnostics topic.

Download / Upload

In the lower right corner of the Details section, **Download data** and **Upload** buttons are available for sending and/or viewing activity information. For example, if Stibo Systems does not have direct access to a system but it is necessary to provide activity data to them for support activities, the data can be downloaded using the **Download data** button. This could then be sent to Stibo Systems, who could upload it to view the data contained in the package. However, as with the Snapshot functionality, it is preferred that the Send Diagnostics feature be used in place of this to ensure that the complete set of relevant information is sent. Refer to the Send Diagnostics topic for more information.

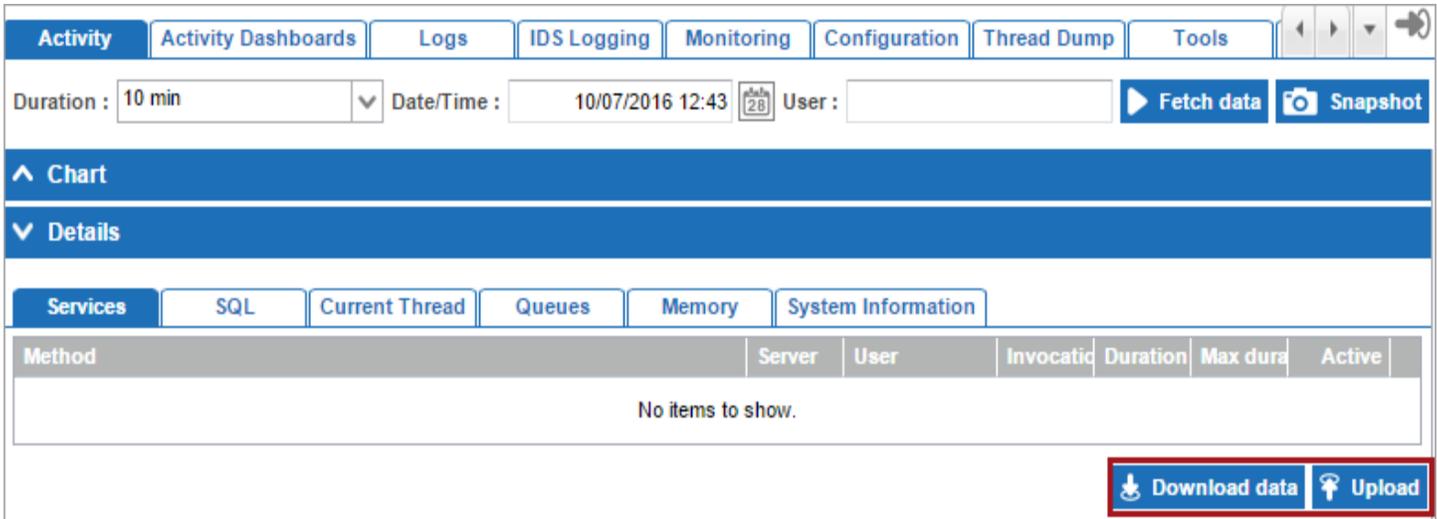

The screenshot shows the Stibo Systems interface. At the top, there are navigation tabs: Activity, Activity Dashboards, Logs, IDS Logging, Monitoring, Configuration, Thread Dump, and Tools. Below these are input fields for Duration (10 min), Date/Time (10/07/2016 12:43), and User. There are buttons for 'Fetch data' and 'Snapshot'. A 'Chart' section is collapsed, and the 'Details' section is expanded. Under 'Details', there are sub-tabs: Services, SQL, Current Thread, Queues, Memory, and System Information. Below these is a table with columns: Method, Server, User, Invocatio, Duration, Max dura, and Active. The table is currently empty, displaying 'No items to show.'. In the bottom right corner of the interface, the 'Download data' and 'Upload' buttons are highlighted with a red box.

The download function is not specific to the current selection, meaning that all data accessed in the fetch data / snapshot actions is included in the download. The download provides a zipped file containing an XML file with the data, along with an additional zipped file with the system logs from all servers in a clustered environment.

Activity Dashboards


The Activity Dashboards tool measures and displays the amount and types of activities that have been performed by the STEP installation, including requests made to the system and how long it takes for the requests to be answered. This tool plays a vital role in performance management.

Default Reporting


Monitored events and information captured in the default reporting tools include:

- Requests handled by the STEP application servers from different types of clients, such as the Web UI (Portal) and STEP Workbench clients
- Background process executions
- Metrics such as application server to database latency

When first accessing the dashboards, an overview is provided displaying requests and response times across various types of clients, as well as requests from active users, as shown below.

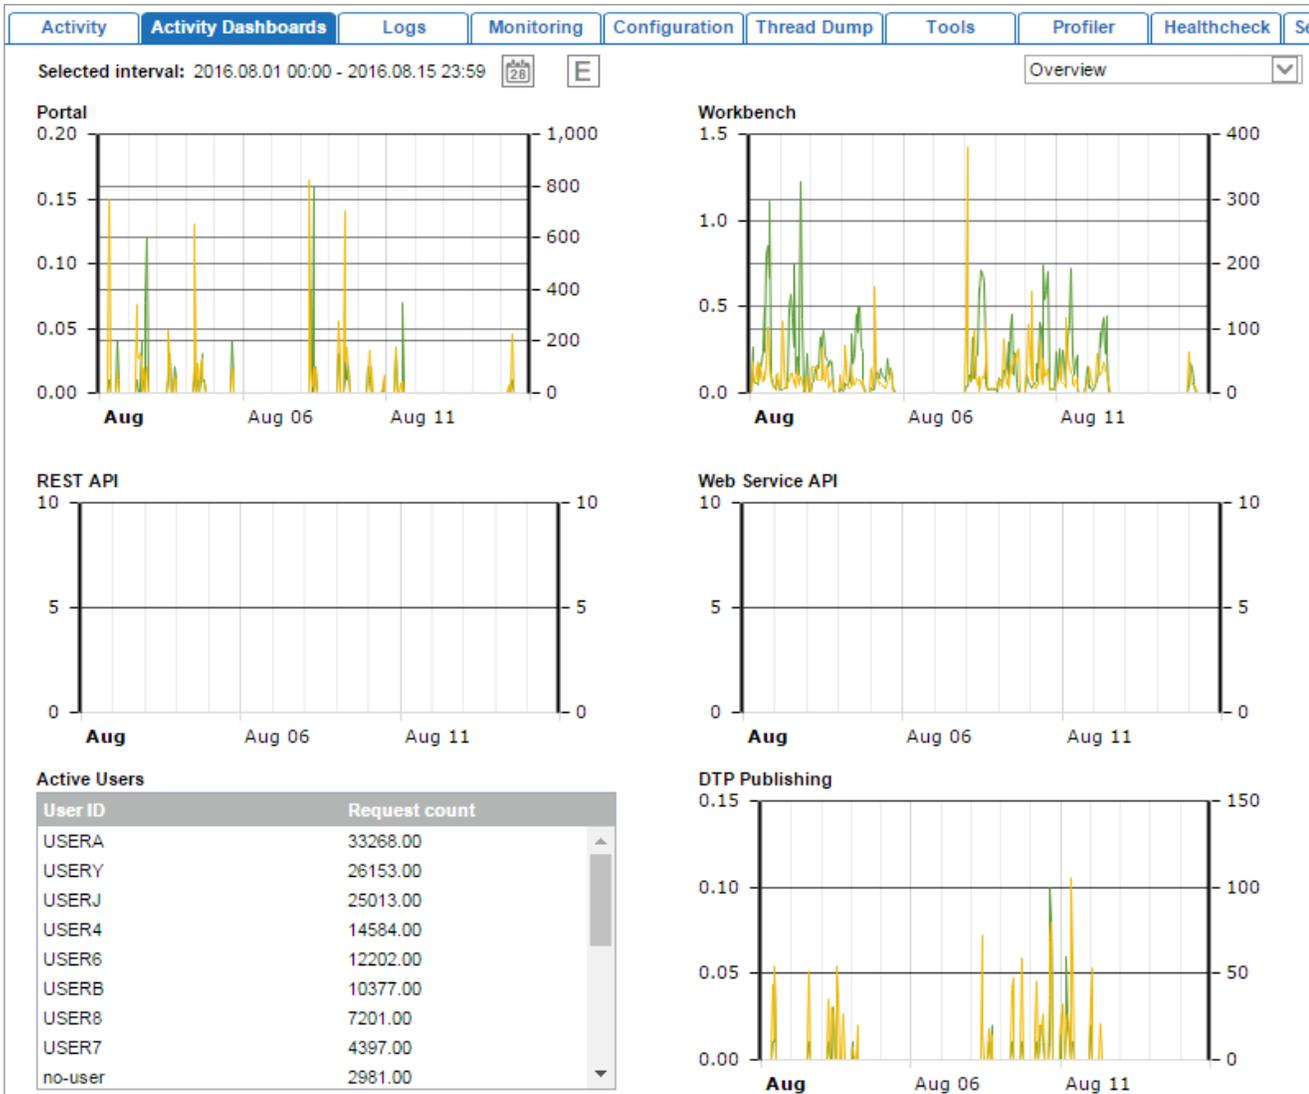


The system defaults to displaying data for the past hour, though the interval can be changed using the date picker icon. The 'no-user' that displays within the Active Users is related to the STEP Application checks that take place while the application is running. The 'no-user' activities are related to a number of things - e.g., ping requests to the Oracle database (i.e., the connection check that the application does), checks for authentication token expiry (in other words, checking if users' sessions have expired), pings to the other nodes within the cluster, and making sure that STEP caching is synchronized.

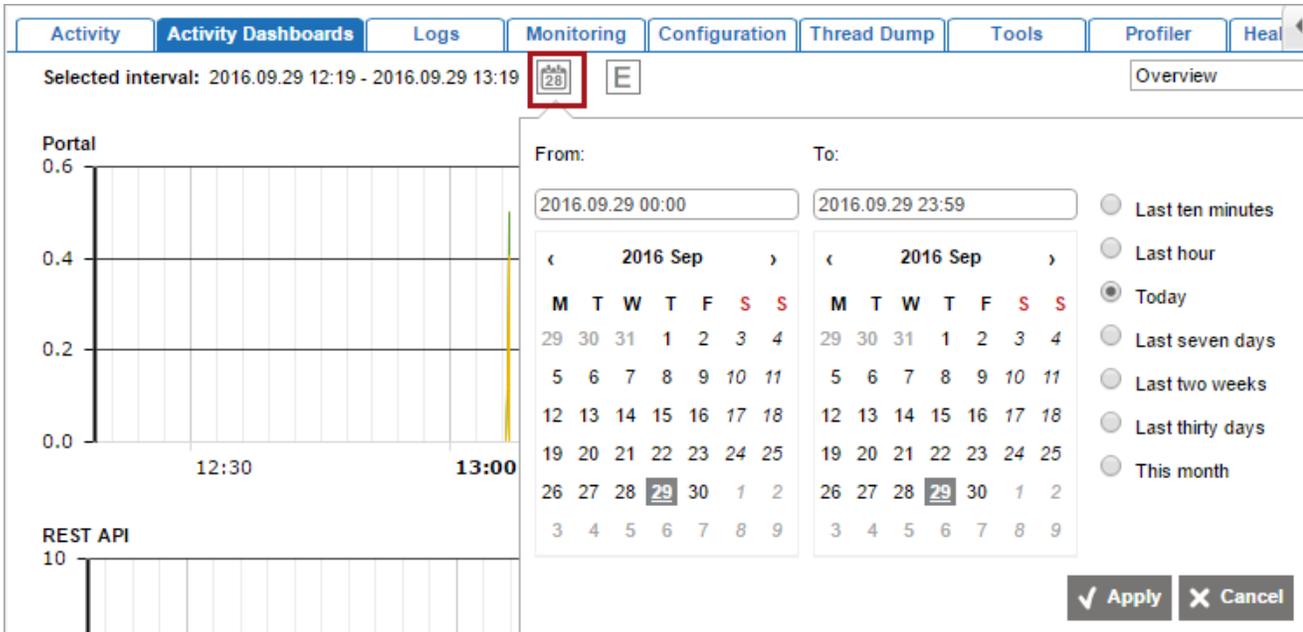


In addition, users can view more detailed information by hovering or adjusting the profile.

Hover over any displayed profile to view data for the request rate and response time at a specific point in the profile.

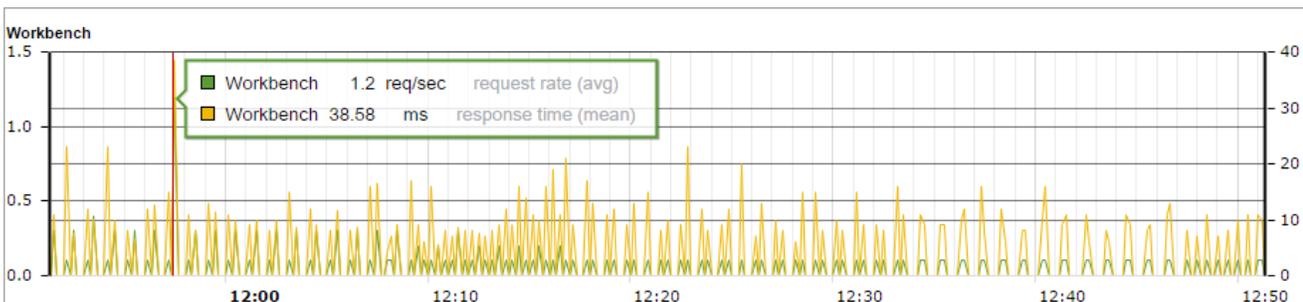

Adjust the profile using the dropdown in the upper right corner.

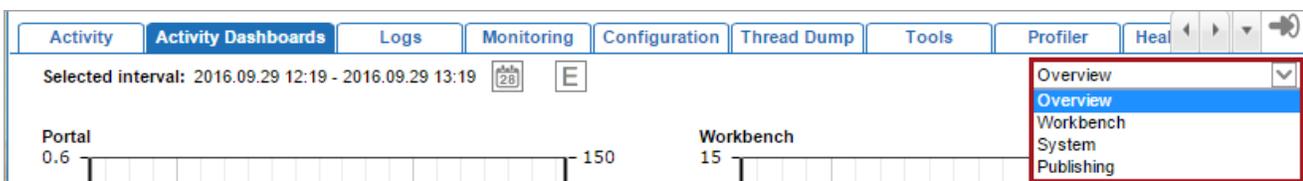

This allows users to view more detailed information within the workbench and Publishing profiles, as well as to access System information that is not exposed in the default rendering. The selected interval is also applied (and can be updated) within any of the detailed profiles. A description of each profile is provided below.


- **Overview:** Default profile displaying the number of requests made via the Web UI (Portal), STEP Workbench, REST API, Web Service API, user actions, and DTP Publishing.
- **Workbench:** Provides more granular information on requests and response times in the workbench, beyond what is included in the overview. Specifically, requests and response times of the Product Editor, Classification Editor, value editing, object approvals, and drill-down searches (e.g., navigation in Tree).
- **System:** Displays the latency between the application server and the Oracle database. If high latency is shown, this should be addressed with the IT department hosting the server.
- **Publishing:** Provides more granular information on requests and response times between the STEP application server and an InDesign / DTP server, beyond what is included in the overview. The average and maximum duration of calls made to the application server are provided per call and displayed with the longest durations first so that long-running calls can be quickly identified. Additionally, object retrieval rate and duration, object write rate and duration, and other services rates and durations are provided.

Ad Hoc Queries

The Activity Dashboards tab includes ad hoc querying functionality accessible via the **E** button at the top of the tool. However, this functionality is recommended for use only by Stibo Systems Technical Support and is therefore not described.

User Activity

The options available on the User Activity tab make it possible for system administrators to easily gather information about which users have been active and which users have been inactive in the system within a specified time period. This information is extracted by generating and downloading a CSV report.

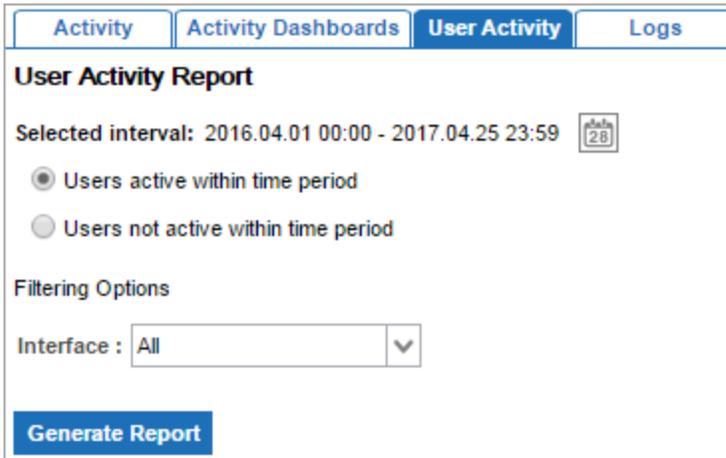


Information on active and inactive users is beneficial for businesses who have a set number of allowed users in the system and need to determine which accounts have been inactive for a prolonged period of time so they can be deleted.

Note: To access this functionality, activity logging must be enabled on your system. By default, the `ActivityLog.Enabled` configuration property is set to 'true.' If the default has been changed to 'false', then the User Activity tab will not be available. This configuration property is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.


Generating a User Activity Report

1. After logging in to the Admin Portal, navigate to the **User Activity** tab.
2. Click the Calendar icon to choose a **From** date and **To** date for the user information that should be included in the report. To use a pre-made filter, choose one of the radio buttons along the right side of the calendar dialog. Time frames for these options range from the last 10 minutes to the last 30 days.

3. Once the desired date range has been chosen, click **Apply**.
4. Under the 'Activity Report' header on the left side of the screen, choose whether to view information on users who were **active** or **not active** within the selected time period by selecting the corresponding radio button.
5. In the **Filtering Options** dropdown menu, choose the interface from which to gather user information. The options are:
 - All
 - Workbench
 - Web UI
 - SOAP API
 - REST API
 - Background Processes
 - DTP (if the most recent time a user logged into STEP was from within InDesign)

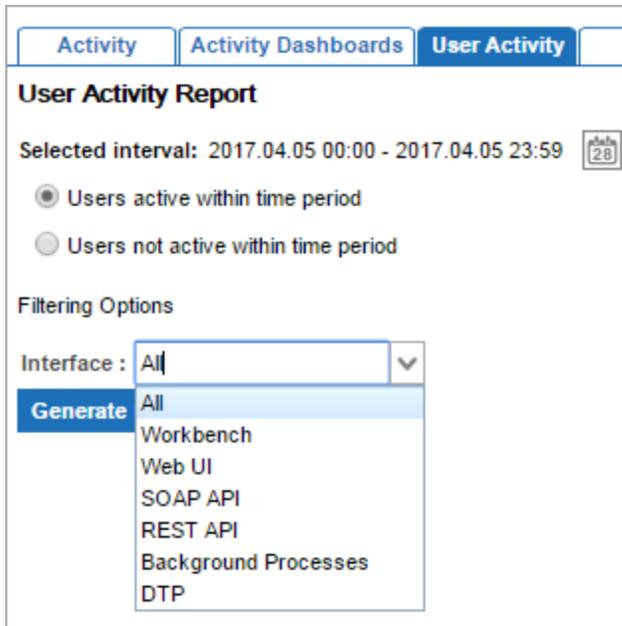

6. After selecting the interface, click **Generate Report**.
7. When the report has generated, it will automatically display in the browser, as pictured below for Chrome.

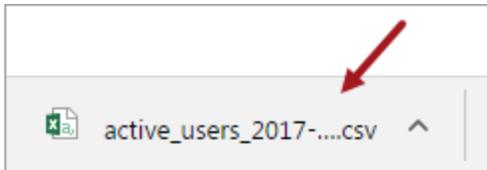

The file is named as follows:

- Active users: *active-users-[InterfaceIfNotAll]_[fromISODateTime]-[toISODateTime].csv*
- Inactive users: *inactive-users-[InterfaceIfNotAll]_[fromISODateTime]-[toISODateTime].csv*

Note: For the report to appear once generated, first disable popup blockers for STEP instance's Start Page URL in your browser (for example, <http://user-dev>).

8. For lists of **active** users, the resulting CSV file includes the following information:

- User ID - STEP ID of the user
- User Name - STEP name of the user
- Interface - The STEP interface where the latest activity occurred for the user (for example, the workbench)
- Latest Activity - Date and time of the latest activity for the user, including the time zone
- User Group IDs - STEP ID of the user group(s) to which the user belongs. If a user belongs to more than one user group, the additional groups appear as semicolon-separated values.

	A	B	C	D	E
1	User ID	User Name	Interface	Latest Activity	User Group IDs
2	USERJ	User J	workbench	2017-04-25T17:01:18-04:00[America/New_York]	Super Users
3	USER1	User1	restapi	2017-04-21T07:54:41-04:00[America/New_York]	User Group
4	USER4	User 4	dtp	2017-04-25T16:49:24-04:00[America/New_York]	Super Users
5	USERE	User E	workbench	2017-04-24T13:10:38-04:00[America/New_York]	Super Users
6	USERL	User L	workbench	2017-04-25T17:05:05-04:00[America/New_York]	Super Users;Great Goods;Products Galore
7	USER	User	bgp	2017-04-20T08:52:56-04:00[America/New_York]	Super Users;Suppliers;Brand;Merchandisers
8	WEBUSER1	webuser1	web ui	2017-02-22T13:04:26-05:00[America/New_York]	Web UI Group
9	USERM	User M	bgp	2017-04-25T17:11:46-04:00[America/New_York]	Super Users
10	USER7	User 7	workbench	2017-04-24T01:29:16-04:00[America/New_York]	Super Users
11	STEPSYS	stepsys	workbench	2017-04-17T11:28:41-04:00[America/New_York]	Stibo Users
12	WEBUSER	WebUser	web ui	2017-04-11T16:23:19-04:00[America/New_York]	Web UI Group
13	DBA	DBA	workbench	2017-04-11T12:27:46-04:00[America/New_York]	Super Users

active_users_2016-04-01T16-08-0

9. For **inactive** users, the CSV file includes:

- User ID
- User Name
- User Group IDs


	A	B	C
1	User ID	User Name	User Group IDs
2	ASSETHOTFOLDER	Asset Hotfolder	Stibo Users
3	USER2	User 2	Super Users
4	USERZ1	Johnny Bench	Super Users
5	WAREHOUSE1	warehouse1	Warehouse Group
6	REGULATORY1	Regulatory User 1	Regulatory Group
7	SUPPLIER2	supplier2	Great Goods;Suppliers
8	COPYWRITER1	Copywriter1	Marketing Copy Group;DTP Managers
9	SUPPLIER1	supplier1	Super Users;Products Galore;Suppliers
10	USER5	User 5	Super Users;Suppliers;Acme
11	USER71	User 71	Image Group
12	ECOM1	ecom1	eCom Group
13	USER9	User 9	Super Users

inactive_users_2016-04-02T00-00

Standard STEP users that do not count against the number of licensed users—such as DBA, STEPSYS, SERVICE, and SWADMIN—are not included in the inactive user report.

Considerations

- If data is not available for a selected time period—typically when a 'from' time is entered that is earlier than the earliest system-wide log entry—the system returns a status message advising that log data is not available for the requested time period.

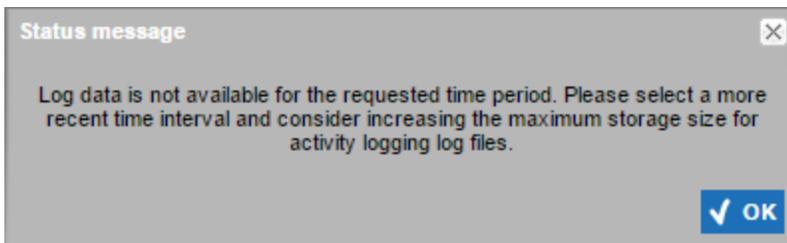


- To keep older activity logs on the system for a longer period of time, storage space should be increased. The default maximum amount allowed for raw log file storage is 1,000 megabytes `ActivityLog.RawLogs.MaxStoreSize=1000`. This can be overridden by changing the 1000 default value. This configuration property is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.

- Caution should be exercised when making a decision to delete an inactive user. For example, a user may appear inactive in the system but should not be removed because they might be the designated recipient of error messaging from a workflow or integration endpoint. In general, a user should not be deleted if you do not know why the user was originally created.

Logs

The Logs tab provides access for users to view and download the system logs, using the **Fetch data** button to retrieve the information. In a clustered environment, each available server is listed for selection in the dropdown.

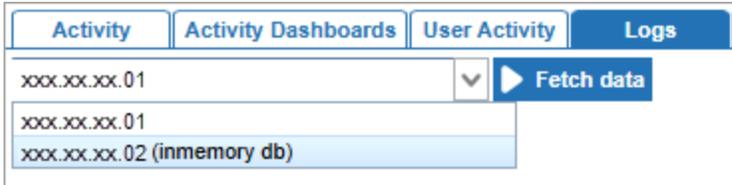

Fetching the data displays the most recently accessed log files, followed by drill down options for accessing additional logs.

File name	Description	Tail	View	Download
[-] [recent]				
[-] step.0.log	Main STEP Log file	Tail	View	Download
[-] js.0.log	Main JavaScript Log file	Tail	View	Download
[-] gc.log	Main Garbage Collection Log file	Tail	View	Download
[-] step.1.log	Previous STEP Log file	Tail	View	Download
[-] old-logs.2024-05-01_05-06-34				
[-] gc.log	Previous Garbage Collection Log file	Tail	View	Download
[-] spot.0.log	Main Spot Log file	Tail	View	Download
[-] spot.1.log	Previous Spot Log file	Tail	View	Download
[+] logs				
[+] grahpql				
[+] js-logs				
[+] gc-logs				
[+] Spot-logs				
[+] reports				
[+] Autoupgrader-logs				
[+] metrics				
[+] message-streaming				

Several configuration properties are available to control logging functionality. These configuration properties are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.

Note: Log files are automatically included in diagnostics packages sent to Stibo Systems. For more information on sending diagnostics, refer to the Send Diagnostics topic.

Log Types

Logs are stored based on their type as defined in the following sections.

Logs

The `logs` folder includes the main STEP logs (`step.X.log`) and the `install.log` file, which lists all prepared and installed recipes on the system.

File name	Description	Tail	View	Download
+ [recent]				
- logs				
 <code>step.0.log</code>	Main STEP Log file	Tail	View	Download
 <code>install.log</code>	STEP build install Log file	Tail	View	Download
 <code>step.1.log</code>	Previous STEP Log file	Tail	View	Download
 <code>step.2.log</code>	Older STEP Log file	Tail	View	Download
 <code>step.3.log</code>	Older STEP Log file	Tail	View	Download
 <code>step.4.log</code>	Older STEP Log file	Tail	View	Download

The STEP log files are used primarily for system monitoring and troubleshooting and contain a large amount and variety of information, including stack trace information for errors and exceptions not handled by the GUI. The zero log (`step.0.log`) is the current log, with older log files indicated by incrementing integers.

The `install.log` is especially useful in determining the current build / patch applied to any system. It contains a list of all recipes that have been applied to the system, in sequential order.

2020-04-02-14-01-38	Installed	upgrade.BASELINE_WITHIN_MP.elasticsearch-integration-7.0.9.step-9.3-mp3-2020-04-01-15-44-20
2020-07-07-13-49-16	Prepared	step-10.0-2020-05-20-16-06-02
2020-07-07-14-43-02	Prepared	step-10.0-mp1-2020-07-07-13-55-01
2020-07-07-16-11-52	Installed	step-10.0-mp1-2020-07-07-13-55-01

Trace

When business rule tracing is enabled, the trace folder contains the logs for business rules tracing. This functionality is enabled on the Tools tab and is described within the Tools topic. The trace files follow the same format as the main STEP logs where the zero log (`trace.0.log`) is the current log, with older log files indicated by incrementing integers. The zero log will be empty and no additional log files will appear if business rules tracing has not been enabled.

JS Logs

JavaScript business rules log messages to the files stored in the `js-logs` folder. Log entry severity levels can be indicated within the JavaScript code (as defined in the Logger Bind topic); however, the environment type determines which log entries are reported by default:

- Test and Development environments log INFO, WARNING, and SEVERE entry severity levels.
- Production environments only log SEVERE entry severity levels.

In the Self-Service UI, select an environment and click the 'Configuration properties' tab. Configure the **JavaScript.Logging.LogLevel** property as shown below.

Key	Value	Actions
JavaScript.Logging.LogLevel	WARNING	 

GC Logs

The `gc-logs` folder contains the garbage collector log files, following a similar format as the main STEP logs where the current log is `gc.log.0.current`, and older log files are indicated by incrementing integers.

File name	Description	Tail	View	Download
 <code>gc-logs</code>				
  <code>old-logs.2024-09-26_10-15-11</code>				
  <code>old-logs.2024-09-23_08-52-01</code>				
 <code>gc.log.3</code>	Older Garbage Collection Log file	Tail	View	Download
 <code>gc.log.2</code>	Older Garbage Collection Log file	Tail	View	Download
 <code>gc.log.1</code>	Older Garbage Collection Log file	Tail	View	Download
 <code>gc.log.0</code>	Older Garbage Collection Log file	Tail	View	Download

Beyond the current log file, the garbage collection logs are organized in subfolders by date. The garbage collector log files are used primarily when a system is reporting out of memory and/or heap space errors as they can be useful in these cases to identify where the system is spending time in garbage collection.

SPOT Logs

The `spot-logs` folder contains logs with information about patch deployment and start-up. This allows admins to troubleshoot issues when deploying a custom add-on developed using the Extension API.

File name	Description	Tail	View	Download
  <code>gc-logs</code>				
  <code>Spot-logs</code>				
 <code>spot.0.log</code>	Main Spot Log file	Tail	View	Download
 <code>spot.1.log</code>	Previous Spot Log file	Tail	View	Download
 <code>spot.2.log</code>	Older Spot Log file	Tail	View	Download
 <code>spot.3.log</code>	Older Spot Log file	Tail	View	Download

Message-Streaming Logs

When the MessageStreaming license is applied, access to the Kafka Streaming Receiver in inbound integration endpoints (IIEPs) is granted and message-streaming logs include execution report detail. For more information, refer to the Kafka Streaming Receiver topic in the Data Exchange documentation.

Viewing Options

Users have three options for viewing any of the log files:

- **Tail:** Displays a truncated version of the log file (with only the most recent content) in a new tab in the browser. This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance. The amount of data displayed is defined by the `Admin.TailSize` configuration property (or `Admin.TailSizeNoSession` property, if applicable).
- **View:** Displays the complete content of the log file in a new tab in the browser.
- **Download:** Downloads the complete file to your local machine. This can be used when the information needs to be sent to Stibo Systems for analysis and troubleshooting on systems to which Stibo Systems does not have direct access. However, log files are also included when using the Send Diagnostics tool, which is the preferred method for sending information to Stibo Systems as it does not require users to determine which individual files are relevant to send. For more information on sending diagnostics, refer to the Send Diagnostics topic.

IDS Logging

The IDS (InDesign Server) Logging tab allows users to view and download the InDesign server renderer logs, download the DTP log options, and upload DTP log options.



Viewing and Downloading Logs

To view or download the logs for an InDesign server renderer:

1. Select the desired renderer from the dropdown list in the upper left corner of the screen, then click the **Fetch data** button.



2. Once the data has been fetched, the **logs** folder displays. Click the plus icon next to the folder to expand it to display the log files for the renderer (typically inSTEP.0.log, inSTEP.1.log, and so forth).
3. To download the file to your computer, click the **Download** link.
4. To view the file in a separate browser tab, click the **View** link.


Downloading and Uploading Configurations

The **Download Config** link allows users to download the DTP log options configurations XML file for the renderer, **inSTEPLogOptions.xml**, a snippet of which is shown in the following screenshot. This file is used to configure the level of information shown in the log files as well as the creation and retention settings for these logs on the InDesign server.

```
<dtplLogOptions>
<dtplLogFile cycle="1" file="E:\step\stepindesign.sidecar\indesign-10091\logs\inSTEP.0.log" history="20" maxsize="10M" targetName="dtpLog" />
<dtplLogRule category="commsState" level="warning" target="dtpLog" />
<dtplLogRule category="indtpSTEPUtils" level="warning" target="dtpLog" />
<dtplLogRule category="logicCmd" level="warning" target="dtpLog" />
<dtplLogRule category="performance" level="warning" target="dtpLog" />
<dtplLogRule category="generic\dtpPerformance.cpp" level="warning" target="dtpLog" />
<dtplLogRule category="dtpXMLActionHandler" level="warning" target="dtpLog" />
<dtplLogRule category="dtpAutopage" level="warning" target="dtpLog" />
```

To change the DTP log options settings:

1. Download the inSTEPLogOptions.xml file by clicking the **Download Config** link.
2. Open the file in an XML editor, then make the relevant edits. Refer to the following subsection, 'Configuring DTP Log File Settings,' for examples of data that might be changed in the file.
3. Once edits are complete, click the **Upload config** button.
4. In the Upload Config dialog, click **Choose File** to navigate to the file location.
5. Once the file is selected, click **Submit** to upload the edited file to the InDesign server.

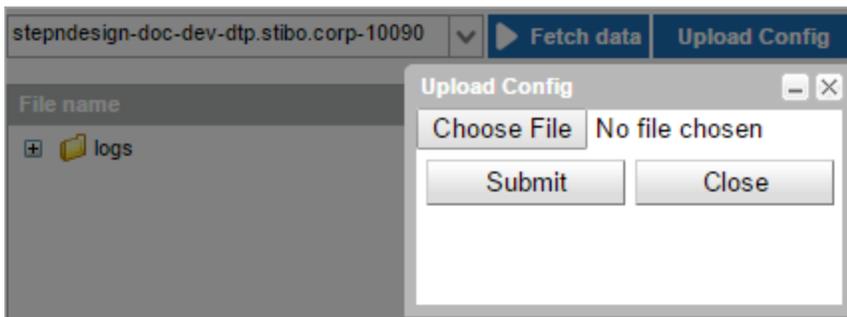

Configuring DTP Log File Settings

The first line of the **inStepLogOptions.xml** file consists of the `<dtplLogFile/>` tag. This tag contains the XML attributes that control the maximum size of log files, how many old log files should be retained, the location on the server where the logs should be stored, and how frequently new log files should be created. These values can be edited in the downloaded file, then re-uploaded to the InDesign server to change the defaults.


```
<dtplLogFile cycle="1" file="E:\step\stepindesign.sidecar\indesign-10091\logs\inSTEP.0.log" history="4" maxsize="10M" targetName="dtpLog" />
```

1. **Cycle** - If `cycle="1"`, a new log file will be created every time the renderer is started, i.e., every time a job is sent to the renderer. If `cycle="0"`, or if the cycle attribute is removed altogether, then a new log file will only be created when the current file reaches the maximum file size specified in the 'maxsize' attribute.

2. **File** - This path specifies the location on the InDesign server where the inSTEP log files are stored.
3. **History** - The limit number of history files saved. The name scheme of inSTEP.x.log will max out where X equals the value of **history**. I.e., if history="4", any time a new .0 log is created, the oldest log (.4) will be deleted and the former .3 log will replace the .4 log, leaving one active log (.0) and four historical logs (.1 through .4).
4. **MaxSize** - This value is the limit of each log size. Once this limit is reached, a new log file is created. The newest log is always the '0' log. Older logs are numbered incrementally, one step up. I.e., the second-oldest log is the '1' log, and so forth.

Error Handling

If a renderer is down or is busy and the data cannot be fetched after 60 seconds, an error message will be thrown similar to the one shown in the image below. For a sidecar that is not running, the error reads, 'No items to show. Renderer is offline.' For a sidecar that is busy after 60 seconds, the error reads, 'The InDesign renderer is currently not responding. Please try again in a few minutes.'

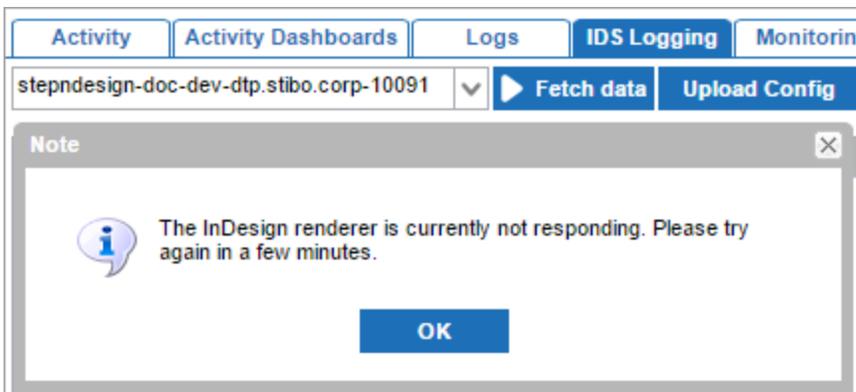

For more information regarding InDesign queues, refer to the InDesign Queues topic of the Publisher (Adobe InDesign Integration) documentation.

Monitoring

The Monitoring tab is used to monitor servers and events and is divided into three sections, each of which is described below.

Network

The Network section displays the latency between the servers in a STEP environment, including the database and Oracle servers, which can be useful information when troubleshooting performance issues.

Activity		Activity Dashboards		Logs		IDS Logging		Monitoring	
<div style="background-color: #0056b3; color: white; padding: 2px;"> ▼ Network </div>									
Server					Ping (ms)				
oracle					0.168 ms				
doc-dev:80					0.181 ms				

Event Queue Content

The Event Queue Content section displays basic information about the event queues running on the system, accessed by clicking the **Update** button.

Activity		Activity Dashboards		Logs		IDS Logging		Monitoring	
<div style="background-color: #0056b3; color: white; padding: 2px;"> ▲ Network </div>									
<div style="background-color: #0056b3; color: white; padding: 2px;"> ▼ Event Queue Content </div>									
Category							Total		
No items to show.									
Queue Name	Type	Unread Events	Oldest Unread Event	Remark					
No items to show.									
111									
<div style="border: 2px solid red; padding: 5px; display: inline-block;">  Update </div>									

The information retrieved via **Update** is displayed summarily and for individual event queues.

Events are divided into two categories:

- **Disposable:** Disposable events have been handled in some manner but are still retained for a period of time. If no events fall into this category, it is not displayed in the summary. Events can fall into this category in two ways. 1- Events that have occurred on the system and been processed by an event-based outbound integration endpoint or asset push for which the 'Days to Retain Events' parameter is set at something other than zero. 2- Events that were unread for an event-based outbound integration endpoint or asset push and then forwarded (skipped), but not purged.
- **Unread:** Events that have occurred on the system and are queued for handling by an event-based outbound integration endpoint, event processor, or asset push, but have not yet been processed. Events queued for handling by event processors are shown in the summary only, and not in the queued breakdown. Additionally, if event queues have been deleted but are still in the System Setup recycle bin, and had unread events prior to their deletion, those events will also be shown (until the deletion has been approved and/or purged). Therefore the total shown may not match the individual event queue totals if unread event processor events exist.

All event-based outbound integration endpoints (Type=EQ) and asset push event queues (Type=APQ) are displayed, along with the number of unread events for the queue, and the date and time the oldest unread event was generated. Typically event queues are set up to regularly process events rather than storing them on the system. Therefore, a remark is present when events have been unprocessed for more than 4 hours as this could indicate a problem with the queue.

Event Queue Content				
Category			Total	
Unread			72	
Queue Name	Type	Unread Events	Oldest Unread Event	Remark
Packaging Hierarchy, Event Based	EQ	0		
TemplateOutboundEvent	EQ	0		
Outbound Endpoint	EQ	20	2015-08-06 14:38:02.0	More than 24 hours old
DTP Queue	APQ	0		

 Update

Additional Links

The Additional Links section provides links to sensors and sidecars, described below.

Activity	Activity Dashboards	Logs	IDS Logging	Monitoring
^ Network				
^ Event Queue Content				
v Additional Links				
Sensors		Sidecars		
Sensors for external monitoring		List of all known Sidecars		

External Monitoring

Clicking the **Sensors for external monitoring link** opens another tab in the browser where all components of the STEP application are displayed. This acts as a landing page for external monitoring systems to check the status of the various components. A small example is shown below.

Sensor	Status
AutoScaleSensor-Has-Ready-Work	Ok Has waiting work
Database-dbpings	Ok Database connection is ok
Database-checkparam	Ok The database looks to be configured correctly
ElasticsearchMonitoringSensor-Elasticsearch	Critical Unavailable
EventProcessorStatus-dfgad2	Ok Event Processor is discarding events
EventProcessorStatus-ESSearchScreen	Ok Event Processor is stopped
EventProcessorStatus-DnBCompanyProfileProcessor	Ok Event processor is running
EventQueueSensor-CloudBlob - Azure	Ok Event queue is OK

The available sensors include information on Java heap usage, http (local and remote), event queues, scheduled jobs, web services, security, and more. It is not possible to add additional custom sensors. However, not all sensors need to be monitored and users can choose to monitor only the subset that they are interested in.

Clicking on any of the sensor links provides additional information for that particular component. For example:

Sensor status for EventQueueSensor-CrossContextAdvancedSTEPXML

Plugin EventQueueSensor
Sensor CrossContextAdvancedSTEPXML
Status Ok
Created Fri Oct 07 15:28:17 EDT 2016 (0 seconds ago)
TTL 30 seconds

Short message Event queue is OK

Performance data

Name	Value	Unit	Warning	Critical	Min	Max
Estimated number of unread events	2.0					

Formats

The status shown on this page is also available in the following machine-friendly formats:

- [A simple status string](#), Possible values: OK, WARNING, CRITICAL, UNKNOWN.
- [Nagios plugin output](#), output formatted for easy integration with Nagios.
- [Full xml](#) all available data in xml for easy parsing by ad-hoc monitoring tools.

Please do not rely on the output of this page for automated monitoring, use one of the formats above.

The links in the Formats section can be used to provide detailed information to an external monitoring system, which needs to call the URL that matches a format understood by the monitoring system. Custom formats can be made if the defaults are not sufficient.

Sidecars Monitoring

Clicking the **List of all known Sidecars** link opens the Known Sidecars page in a new browser tab. This page shows a list of sidecars configured on the system and provides links to the associated jar files, as well as links to additional status information.

For more information, refer to the Additional Asset Push Sidecar Information topic in the Digital Assets documentation.

Known Sidecars

This page lists all the known sidecar instances.

assetpush

No instances configured.

assetpushqueue

Deployment jar	Service Name	Current Status
assetpushqueue-AssetPush1.jar	Stibo AssetPushQueue (AssetPush1)	running on 10.232.10.195 since 09:37:11 21 Sep 2016 (one hour and 5 minutes ago)
assetpushqueue-AssetPush2.jar	Stibo AssetPushQueue (AssetPush2)	unused on none since 10:42:37 21 Sep 2016 (moments ago)
assetpushqueue-DTPConfiguration.jar	Stibo AssetPushQueue (DTPConfiguration)	running on 10.232.10.196 since 09:37:11 21 Sep 2016 (one hour and 5 minutes ago)
assetpushqueue-test1.jar	Stibo AssetPushQueue (test1)	unused on none since 10:42:37 21 Sep 2016

loqate

Deployment jar	Service Name	Current Status
loqate-payload.jar	Loqate Server Sidecar (loqate-payload)	Offline or outdated sidecar

stepndesign

Deployment jar	Service Name	Current Status
stepndesign-doc-dev-dtp.stibo.corp.jar	Stibo STEPnDesign (doc-dev-dtp.stibo.corp)	running on 10.232.10.196 since 09:37:12 21 Sep 2016 (one hour and 5 minutes ago)

stepxpress

No instances configured.

When a sidecar is first set up, STEP generates a .jar file for it. If the sidecar should be run on another system, the jar file must be downloaded and installed on the system on which it should be run. Clicking on any of the jar file links downloads the .jar file to your local machine so that it can be installed on a secondary system.

Clicking any Current Status link provides details about the sidecar, including the tail of the recent logs for the sidecar. For example:

Status of assetpushqueue-AssetPush1

state	running
id	assetpushqueue-AssetPush1
host-ip	10.232.10.195
directory	/opt/stibo/sidecarAssetPush1

steady-state-since 09:37:11 21 Sep 2016 (one hour and 8 minutes ago)

last-update 10:45:11 21 Sep 2016 (moments ago)

sidecar-version 2011-07-04

host-clock-skew -26 (ms)

last-client-action 0 seconds ago

Tail of log files

Tail of payload0.log

```
ests: 0 ms, time-save-result: 8 ms, assetIDs: [], statusResults: {}
Sep 21, 2016 10:44:03 AM com.stibo.assetpushclient.AssetPushQueueWorker run
INFO: No events to handle
Sep 21, 2016 10:44:33 AM com.stibo.assetpushclient.AssetPushQueueWorker run
INFO: Fetched 0 requests from server
Sep 21, 2016 10:44:33 AM com.stibo.assetpushclient.AssetPushQueueWorker run
INFO: Handled 0 requests, time-get-requests: 22 ms, time-handle-requests: 0 ms, time-save-result: 7 ms, assetIDs: [], statusResults: {}
Sep 21, 2016 10:44:33 AM com.stibo.assetpushclient.AssetPushQueueWorker run
INFO: No events to handle
Sep 21, 2016 10:45:03 AM com.stibo.assetpushclient.AssetPushQueueWorker run
INFO: Fetched 0 requests from server
Sep 21, 2016 10:45:03 AM com.stibo.assetpushclient.AssetPushQueueWorker run
INFO: Handled 0 requests, time-get-requests: 19 ms, time-handle-requests: 0 ms, time-save-result: 7 ms, assetIDs: [], statusResults: {}
Sep 21, 2016 10:45:03 AM com.stibo.assetpushclient.AssetPushQueueWorker run
INFO: No events to handle
```

Tail of sidecar0.log

```
.root=/opt/stibo/sidecarAssetPush1 -Dsidecar.payload.scpl=/opt/stibo/sidecarAssetPush1/.sidecar-cache/assetpushqueue-AssetPush1.scpl -Dsi
Sep 21, 2016 9:37:15 AM com.stibo.sidecar.JavaRunner run
INFO: Payload working dir: /opt/stibo/sidecarAssetPush1
Sep 21, 2016 9:37:20 AM com.stibo.sidecar.JavaRunner run
INFO: Starting payload
```

Sensors for External Monitoring

On the Admin Portal Monitoring tab, the **Sensors for external monitoring** link provides access to the sensors described below. For more information on the functionality, refer to the Monitoring topic.

Sensor	Status
AutoScaleSensor-Has-Ready-Work	Ok Has waiting work
Database-dbpings	Ok Database connection is ok
Database-checkparam	Ok The database looks to be configured correctly
ElasticsearchMonitoringSensor-Elasticsearch	Critical Unavailable
EventProcessorStatus-dfgad2	Ok Event Processor is discarding events
EventProcessorStatus-ESSearchScreen	Ok Event Processor is stopped
EventProcessorStatus-DnBCompanyProfileProcessor	Ok Event processor is running
EventQueueSensor-CloudBlob - Azure	Ok Event queue is OK

Sensor Name	Baseline	Sensor Description
AuditMessagingSensor-KafkaStatus	N	'Warning' if a connection cannot be made to Kafka or if one (1) or more topics are not configured in Kafka.
AuditMessagingSensor-ZookeeperStatus	N	'Critical' if no zoo keeper connections are up. 'Warning' if one (1) or more zoo keeper connections are down but one (1) is up.
AutoScaleSensor-Has-Ready-Work	Y	Available only when OneQueueBGPScheduler is enabled. Refer to the BGP One Queue topic. 'Yes' if pending items could run if workers were available: <ul style="list-style-type: none"> BGP Queue contains waiting processes the Merged Golden Record IIEP has more messages (the IIEP is strict mode with Message Processor that supports parallel processing)
AutoScaleSensor-Workers-In-Cluster	Y	Returns the aggregated number of workers in action for BGPs in the cluster.
AutoScaleSensor-Workers-On-Current-Node	Y	Returns the number of workers in action for BGPs on current node.
BackgroundProcessSensor-Number-Of-Active-Background-Processes	Y	Reports the average number of active background processes during the last three (3) periods specified by configuration

Sensor Name	Baseline	Sensor Description
		properties: <ul style="list-style-type: none"> Healthcheck.SystemMetrics.ShortIntervalTime Healthcheck.SystemMetrics.MediumIntervalTime Healthcheck.SystemMetrics.LongIntervalTime
BackgroundProcessSensor-Number-Of-Queued-Background-Processes	Y	Reports the average number of queued background processes during the last three (3) periods specified by configuration properties: <ul style="list-style-type: none"> Healthcheck.SystemMetrics.ShortIntervalTime Healthcheck.SystemMetrics.MediumIntervalTime Healthcheck.SystemMetrics.LongIntervalTime
CpuLoadSensor-JvmCpuAverageLoad	Y	Reports the average CPU load during the last three (3) periods specified by configuration properties: <ul style="list-style-type: none"> Healthcheck.SystemMetrics.ShortIntervalTime Healthcheck.SystemMetrics.MediumIntervalTime Healthcheck.SystemMetrics.LongIntervalTime 'Critical' if data cannot be retrieved.
Database-checkparam	Y	Checks character-sets, sorting, optimizer-parameters, recovery and integrity, block sizes, cache-sizes, etc. 'Critical' if Oracle DB parameters have been incorrectly configured.
Database-dbping	Y	'Critical' if greater than 150 ms. 'Warning' if DB SQL Ping response time exceeds 50 ms.
Database-dbpings	Y	'Critical' if greater than 150 ms. 'Warning' if the DB SQL Ping response time for multiple pings exceeds 50 ms.
DnbSensor-connection-timeout	N	'Critical' if a connection timeout has occurred.

Sensor Name	Baseline	Sensor Description
DnbSensor-dnb-service-error	N	'Critical' if a D&B service error has occurred.
DnbSensor-license-invalid	N	'Critical' if the D&B license is invalid.
DnbSensor-unknown-service-error	N	'Critical' if an unknown service error has occurred.
ElasticsearchMonitoringSensor-Elasticsearch	N	'Critical' if no connection to Elasticsearch.
EventProcessorStatus-[ID]	Y	One (1) sensor will be present per event processor. 'Critical' if event processor has failed due to errors. 'Warning' if event processor is running but has errors.
EventQueueSensor-[ID]	Y	One (1) sensor will be present per event queue. This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance. 'Critical' if the event consumer background process has failed, been aborted, or if the number of queued events exceeds the number specified with configuration property: <ul style="list-style-type: none"> ▪ Monitor.EventQueue.NoOfUnreadEvents.Critical' 'Warning' if there is no active event consumer or if the number of queued events exceeds the number specified with the configuration property: <ul style="list-style-type: none"> ▪ Monitor.EventQueue.NoOfUnreadEvents.Warning
FullGCSensor-PercentOfTimeInFullGCinLast2minutes	Y	'Critical' if more than 90 percent was spent in full garbage collection (GC). 'Warning' if more than 50 percent of the past two (2) minutes was spent in full GC.
FullGCSensor-PercentOfTimeInFullGCinLast10minutes	Y	'Critical' if more than 90 percent was spent in full garbage collection (GC). 'Warning' if more than 50 percent of the past 10 minutes was spent in full GC.
FullGCSensor-	Y	'Critical' if more than 90 percent was spent in full garbage

Sensor Name	Baseline	Sensor Description
PercentOfTimeInFullGCinLast60minutes		collection (GC). 'Warning' if more than 50 percent of the past 60 minutes was spent in full GC.
GatewayIntegrationEndpointStatus-[ID]	Y	One (1) sensor will be present per gateway integration endpoint. 'Critical' if errors were reported within the last 24 hours. 'Warning' if errors were reported.
GCOverheadSensor-FullGCOverheadLoad	Y	Reports the percentage of time in full garbage collection (GC) during the last three (3) periods specified by configuration properties: <ul style="list-style-type: none"> Healthcheck.SystemMetrics.ShortIntervalTime Healthcheck.SystemMetrics.MediumIntervalTime Healthcheck.SystemMetrics.LongIntervalTime
GraphQLHealthcheckSensor-GraphQLv2Healthcheck	Y	'OK' when GraphQLv2 has successfully started
HipaaQueueSensor-delivery	N	Used when HIPAA logging is enabled. This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance. 'Critical' if STEP has been unable to deliver log messages during the last number of seconds specified with configuration property: <ul style="list-style-type: none"> HipaaQueueSensorDroppedThresholdSec
HipaaQueueSensor-dropped	N	Used when HIPAA logging is enabled. This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance. 'Critical' if STEP has dropped log messages for insertion into the HIPAA log during the last number of seconds specified with configuration property: <ul style="list-style-type: none"> HipaaQueueSensorDroppedThresholdSec

Sensor Name	Baseline	Sensor Description
HipaaQueueSensor-waiting	N	<p>Used when HIPAA logging is enabled.</p> <p>This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>'Warning' if STEP has waited for insertion into the HIPAA log during the last number of seconds specified by the configuration property:</p> <ul style="list-style-type: none"> HipaaQueueSensorWaitThresholdSec
Http-local	Y	<p>HTTP connection to local host.</p> <p>Always responds with 'OK' if monitoring sensor can be called.</p>
Http-remote	Y	<p>HTTP connection to other nodes in cluster.</p> <p>'Critical' if one (1) or more nodes in the cluster cannot be reached.</p>
HttpNumberOfRequestsPerSecondSensor-Number-Of-Http-Requests-Per-Second	Y	<p>This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Reports the average number of HTTP requests per second during the last three (3) periods specified by configuration properties:</p> <ul style="list-style-type: none"> Healthcheck.SystemMetrics.ShortIntervalTime Healthcheck.SystemMetrics.MediumIntervalTime Healthcheck.SystemMetrics.LongIntervalTime
HttpResponseTimeSensor-Avg-Http-Response-Time	Y	<p>This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Reports the average request response time during the last three (3) periods specified by configuration properties:</p> <ul style="list-style-type: none"> Healthcheck.SystemMetrics.ShortIntervalTime Healthcheck.SystemMetrics.MediumIntervalTime

Sensor Name	Baseline	Sensor Description
		<ul style="list-style-type: none"> Healthcheck.SystemMetrics.LongIntervalTime
ImageCacheCleanupSensor-[pipeline]	Y	<p>One (1) sensor will be present per cached image pipeline.</p> <p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>'Warning' if used cache size exceeds the max cache size specified for the pipeline by configuration property:</p> <ul style="list-style-type: none"> ImageCache.Size.[pipeline]
InboundIntegrationEndpointStatus-[ID]	Y	<p>One (1) sensor will be present per inbound integration endpoint (IIEP).</p> <p>'Critical' if IIEP has failed due to errors.</p> <p>'Warning' if IIEP is running but has errors.</p>
InMemorySensor-Status	N	<p>Used when the In-Memory component is installed.</p> <p>Reports if In-Memory is enabled.</p>
JVM-heapsize	Y	'Critical' or 'Warning' if the heapsize is too small or too large compared to available physical memory.
JVM-hugepages	Y	'Warning' if hugepages are not configured and OS supports it.
KafkaStreamingReceiverStatusSensor-[ID]		<p>'Critical' if IIEP has been stopped due to failure.</p> <p>'OK' if the IIEP is enabled and running or disabled.</p>
LicenseSensor-all-expires	Y	<p>'Critical' if no valid license.</p> <p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>'Warning' if all licenses will expire within the number of days specified with configuration property (default is 21):</p> <ul style="list-style-type: none"> Admin.LicenseWillExpire.SensorWarning
LicenseSensor-some-expires	Y	'Critical' if no valid license.

Sensor Name	Baseline	Sensor Description
		<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>'Warning' if one (1) or more licenses will expire within the number of days specified with configuration property (default is 21):</p> <ul style="list-style-type: none"> Admin.LicenseWillExpire.SensorWarning
MemorySensor-LowMemory	Y	<p>Max percentage of time spent on GC threshold can be modified by Stibo Systems.</p> <p>'Critical' if too much time is spent on garbage collection (GC).</p>
NumberOfThreadsSensor-NumberOfThreads	Y	<p>This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Reports the number of threads during the last three (3) periods specified by configuration properties:</p> <ul style="list-style-type: none"> Healthcheck.SystemMetrics.ShortIntervalTime Healthcheck.SystemMetrics.MediumIntervalTime Healthcheck.SystemMetrics.LongIntervalTime
OffHeapMemorySensor-Free	N	<p>Off heap memory status.</p> <p>'Critical' if less than 10 percent free off heap memory.</p> <p>'Warning' if less than 12 percent free off heap memory.</p>
OracleAlertLog-last-day	Y	<p>Monitors the Oracle alert log.</p> <p>This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>'Critical' if one (1) of the ORA codes specified in the following configuration property has been reported within the last day:</p> <ul style="list-style-type: none"> Oracle.Sensor.AlertLog.Critical <p>'Warning' if one (1) of the ORA codes specified in the following</p>

Sensor Name	Baseline	Sensor Description
		configuration property has been reported within the last day: <ul style="list-style-type: none"> Oracle.Sensor.AlertLog.Warning
OracleAlertLog-last-hour	Y	Monitors the Oracle alert log. This functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance. 'Critical' if one (1) of the ORA codes specified in the following configuration property has been reported within the last hour: <ul style="list-style-type: none"> Oracle.Sensor.AlertLog.Critical 'Warning' if one (1) of the ORA codes specified in the following configuration property has been reported within the last hour: <ul style="list-style-type: none"> Oracle.Sensor.AlertLog.Warning
OutboundIntegrationEndpointStatus-[ID]	Y	One (1) sensor will be present per outbound integration endpoint (OIEP). 'Critical' if OIEP has failed due to errors. 'Warning' if OIEP is running but has errors.
PolicyEvaluationSensor-CheckActivePoliciesLatestScore	N	'Critical' if Customer MDM monitoring policies were not evaluated correctly.
PolicyManagerSensor-CheckLatestDataQualityBGP	N	'Critical' if the latest data quality checker background process contained errors.
RestApiHealthcheckSensor-RestApiV2Healthcheck	Y	'OK' when RestAPIV2 has successfully started
ScheduledBackgroundProcessSensor-[ID]	Y	One (1) sensor will be present per scheduled background process. 'Critical' if the last scheduled background process is failed or aborted.
ScheduledJobs-GatherStatsDomain	Y	'Critical' if Oracle itself is running stats and changing execution-plans.
ScheduledJobs-GatherStatsRunning	Y	'Critical' if the Stibo Systems Oracle stats gathering background

Sensor Name	Baseline	Sensor Description
		job is not correctly scheduled.
ScheduledJobs-GatherStatsStatus	Y	'Critical' if the Stibo Systems Oracle stats gathering background job is stopped or has failed. 'Warning' if the Stibo Systems Oracle stats logs have not recently been updated.
Security-ClusterTrafficFilterEnabled	Y	'OK' when the cluster traffic filter is enabled
Security-EnableCSRFProtectionForGetService	Y	CSRF(Cross-site request forgery) protection prevents one-click attacks and/or session riding. 'Warning' if disabled.
Security-EnableIpBlocker	Y	This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance. The configuration property allows an IP to be blocked after a specific number of invalid login attempts. This prevents brute force login attempts by guessing passwords. Note: Do not enable IP-based security unless the network infrastructure supports it. Reports 'OK' and the value for configuration property: <ul style="list-style-type: none"> Security.EnableIpBlocker
Security-FrameBreakerEnabled	Y	Frames reject embedding in external pages to prevent unauthorized use of the system through external sources. 'Warning' if embedding is allowed.
Security-HttpServletWrapperEnabled	Y	Non-printable ASCII characters are purged from HTTP headers to prevent HTTP header injection. 'Warning' if disabled.
Security-IpSessionMapperEnabled	Y	Prevents session hijacking based on client IP address by making a session only valid from the IP that initiated it. Users can still run different sessions from different IP addresses.

Sensor Name	Baseline	Sensor Description
		<p>Note: Do not enable IP-based security unless the network infrastructure supports it.</p> <p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Reports 'OK' and the value for configuration property:</p> <ul style="list-style-type: none"> Security.IpSessionMapper.Enabled
Security-LocalTrafficFilterEnabled	Y	'OK' when the local traffic filter is enabled
Security-LogIpRoute	Y	<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Reports 'OK' and the value for configuration property:</p> <ul style="list-style-type: none"> Security.Log.IpRoute
Security-PasswordEncryptionEnabled	Y	<p>User passwords stored in the database are encrypted to prevent extraction of user passwords in clear text.</p> <p>'Warning' if disabled.</p>
Security-PasswordEncryptionStopSTEPStartupOnMissingJCE	Y	<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Reports on the configuration property:</p> <ul style="list-style-type: none"> Security.PasswordEncryption.StopSTEPStartupOnMissingJCE <p>'Warning' if disabled.</p>
Security-RemoteDeserializationCheckEnabled	Y	<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Reports on the configuration property:</p> <ul style="list-style-type: none"> Security.RemoteDeserializationCheck.Enabled

Sensor Name	Baseline	Sensor Description
		'Warning' if disabled.
Security-ResponseHeaderIncludeHttpStrictTransportSecurity	Y	<p>HTTP Strict Transport Security (HSTS) ensures that all HTTP communication is done via SSL (HTTPS). This prevents attacks such as 'downgrade attacks' and 'cookie hijacking.'</p> <p>'Warning' if disabled.</p>
Security-SHA512PasswordEncryption	Y	<p>All systems should use SHA512 password encryption to provide the greatest security.</p> <p>'Warning' if disabled.</p>
Security-SystemSSL	Y	<p>SSL enables encrypted HTTP traffic (HTTPS).</p> <p>'Warning' if disabled.</p>
Security-UserWithIdenticalUsernameAndPassword	Y	<p>Database should not contain any user with the same text for username and password.</p> <p>'Warning' if the username is the same as the password for one (1) or more users.</p>
Security.EnableCSRFProtectionForGetService.Exclude	Y	<p>Refer to previous row / row above. Customers can keep the property above then disable specifically for a named service by web path.</p>
Sidecar-[sidecar]-[ID]	Y	'Critical' if sidecar is offline or not active.
Sidecar-[sidecar]-[ID]-version	Y	'Critical' if the sidecar version is outdated.
StepFileSystemMonitoring-imagepipelinenative	Y	<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Time it takes to stat the directory identified by the configuration property:</p> <ul style="list-style-type: none"> ImagePipeline.Native <p>'Critical' if greater than 150 ms.</p> <p>'Warning' if greater than 50 ms.</p>
StepFileSystemMonitoring-	Y	This functionality is managed by a configuration property that is

Sensor Name	Baseline	Sensor Description
installbackgroundprocessarea		<p>not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Time it takes to stat the directory identified by the configuration property:</p> <ul style="list-style-type: none"> Install.BackgroundProcessArea <p>'Critical' if greater than 150 ms.</p> <p>'Warning' if greater than 50 ms.</p>
StepFileSystemMonitoring-installhotfolderroot	Y	<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Time it takes to stat the directory identified by the configuration property:</p> <ul style="list-style-type: none"> Install.HotfolderRoot <p>'Critical' if greater than 150 ms.</p> <p>'Warning' if greater than 50 ms.</p>
StepFileSystemMonitoring-installimagecache	Y	<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Time it takes to stat the directory identified by the configuration property:</p> <ul style="list-style-type: none"> Install.ImageCache <p>'Critical' if greater than 150 ms.</p> <p>'Warning' if greater than 50 ms.</p>
StepFileSystemMonitoring-installincidentreportfolder	Y	<p>This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.</p> <p>Time it takes to stat the directory identified by the configuration property:</p> <ul style="list-style-type: none"> Install.IncidentReportFolder


Sensor Name	Baseline	Sensor Description
		'Critical' if greater than 150 ms. 'Warning' if greater than 50 ms.
StepFileSystemMonitoring-installprocessarea	Y	This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance. Time it takes to stat the directory identified by the configuration property: <ul style="list-style-type: none"> Install.ProcessArea 'Critical' if greater than 150 ms. 'Warning' if greater than 50 ms.
STEPflow-wfmping	Y	Reports on legacy workflows. No longer used.
TrafficLight-cluster	Y	Combined sensor status for the cluster. This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance. Change how the result of individual sensors effect the traffic light using the configuration properties: <ul style="list-style-type: none"> Admin.TrafficLight.Downgrade Admin.TrafficLight.Ignore
TrafficLight-local	Y	Combined sensor status for local server. Change how the result of individual sensors effect the traffic light using the configuration properties: <ul style="list-style-type: none"> Admin.TrafficLight.Downgrade Admin.TrafficLight.Ignore
UserLimit-licensed	Y	'Critical' if the number of allowed users has been exceeded. This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.

Sensor Name	Baseline	Sensor Description
		<p>'Warning' if the number of user accounts is close to exceeding the number of allowed users. Warning threshold is controlled with the configuration property:</p> <ul style="list-style-type: none"> Admin.UserLimit.Warning
Webservices-api	Y	'Critical' if the core SOAP service is not available.
Webservices-dtp	Y	'Critical' if the DTP SOAP service is not available.
WebstartHealthcheckSensor-WebstartHealthcheck	Y	'OK' when the WebStart has successfully started.

Configuration

The Configuration tab in the admin portal provides a view of all configuration properties on the system, including a description of each configuration property, information on how to set it, and the current value being used. Most configuration properties have a default value and do not need to be set unless a change to the default is required.

In a clustered environment, the relevant system can be selected from the dropdown. Clicking the **Fetch data** button retrieves the properties from the selected system (only one will be available in non-clustered environments so selection is not required).

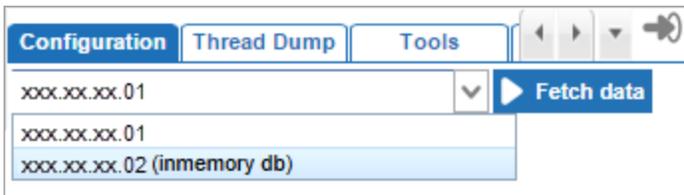

Properties are grouped into categories to aid in navigation, though the simplest way to interact is generally via search (Ctrl + F). Properties that have been explicitly set are shown in bold, while those using system defaults are dimmed. A sampling of properties displaying both default and manual settings is below.

Activity Activity Dashboards Logs IDS Logging Monitoring **Configuration** Thread Dump Tools Profiler Hea

doc-dev Fetch data

AssetPush

AssetPush.AutoDetectedExtension.MimeTypes=image/*,application/postscript

- Using default value

This defines a list of mimetypes (separated by comma) of generated content where auto-detected extension will be applied (if part of template) Otherwise the original extension will be used. IE. using the default, autodetected extension will only be applied to image and postscript files. You can use "*" as wildcard at the end of mimetype .

AssetPush.BatchSize=100

- Using default value
- Must be an integer.

Upper limit to how many events to read ahead

AssetPush.Concurrency=false

- Using default value
- Must be a boolean (true or false).

Option to run in concurrency mode. Running in concurrency mode means that more than one sidecar can get access to events in the same queue. Running in concurrency mode has the consequence that events will be marked read immediately, i.e. before processing. If processing fails, the event will no longer be available on the queue. In that case the asset must be touched to have a new event generated.

AssetPush.DTPConfiguration=raw-main

- Set in: /workarea/sharedconfig.properties

The default configuration to use from DTPClients (IDS and QXP), in order to obtain pushed assets. The property should be an ID of the configuration. Only relevant for new (queue-based) asset-pusher.

AssetPush.DTPConfiguration.Approved=raw-approved

- Set in: /workarea/sharedconfig.properties

The default configuration to use from DTPClients (IDS and QXP) when workspace is Approved, in order to obtain pushed assets. The property should be an ID of the configuration. Only relevant for new (queue-based) asset-pusher.

Note: Properties must be changed on an environment via the SSUI 'Configuration properties' tab. Properties cannot be changed within the admin portal.

Configuration properties to identify system name and environment


Note: The following functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.



Two essential configuration properties are the **System.Name** and **System.Display.Type**.

The **System.Name** configuration property is used to display the globally unique name of the system. The name is used for human-readable IDs and file names, making it imperative that the given name is readable on all operating systems. Once this globally unique name within Stibo Systems has been applied, it cannot be changed, or it will not be recognized by the server or other operating system. Additionally, the name can only contain letters, numbers, underscores, and dashes. No spaces are allowed in the name. The name of the system displays on the Start Page, on the title bar of the workbench, and in various Stibo-global ID strings.

The type of environment, such as Development, QA, Production, etc., is identified by the **System.Display.Type** configuration property. While this name can be changed without affecting the system, it can only contain letters, numbers, underscores, and dashes. No spaces are allowed in the name. This identification will display on all Web UIs and each workbench context located on the server in the following locations:

- On the Start Page
- On the Web UI tab
- On the Web UI login page
- Inside Web UI next to the current user, context, and workspace
- On the workbench title bar

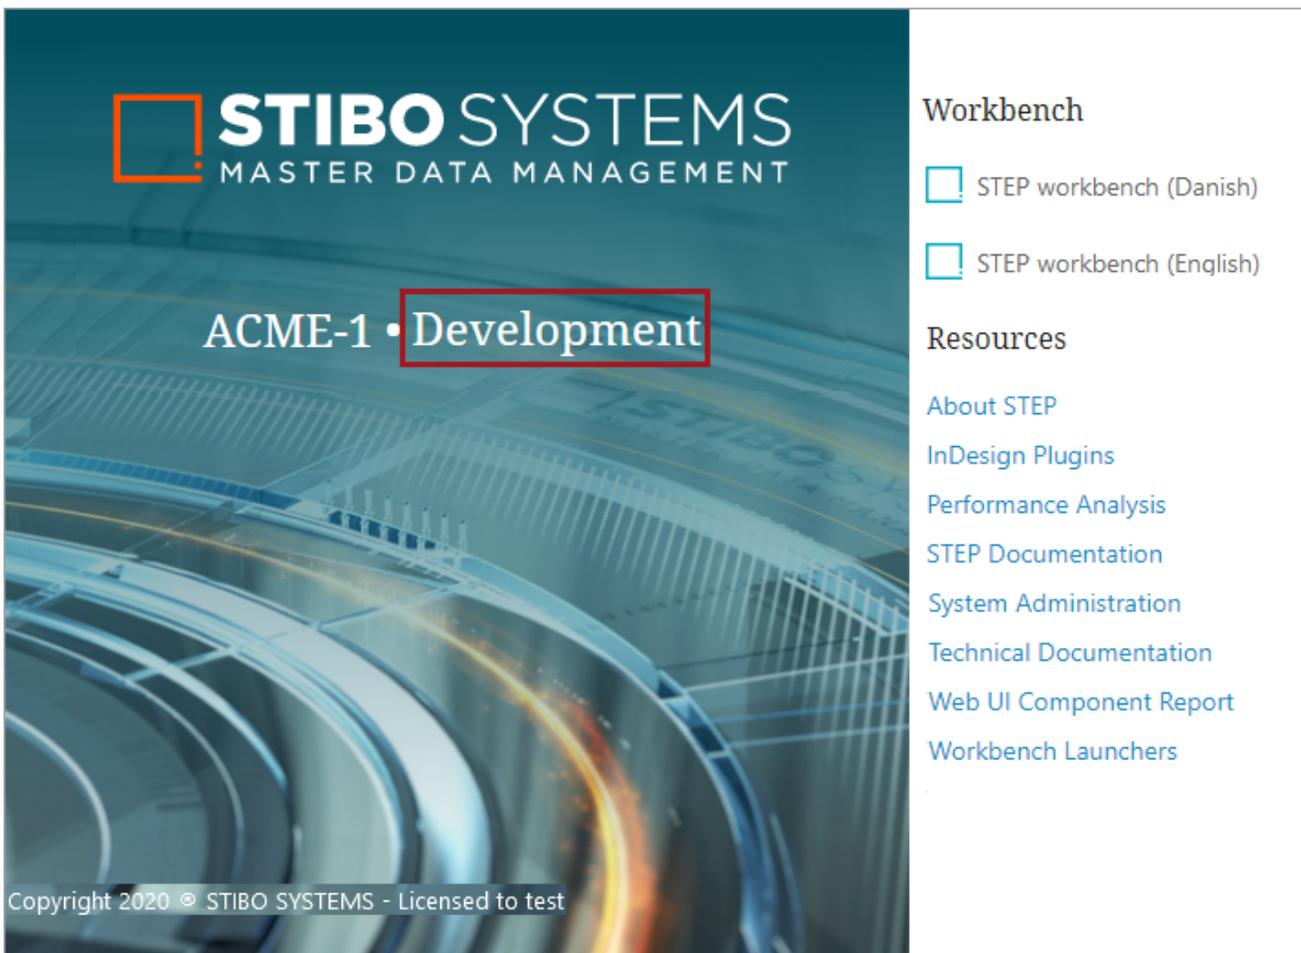

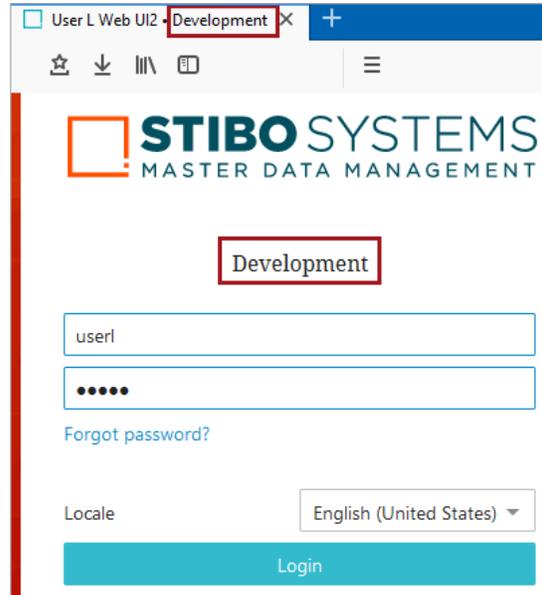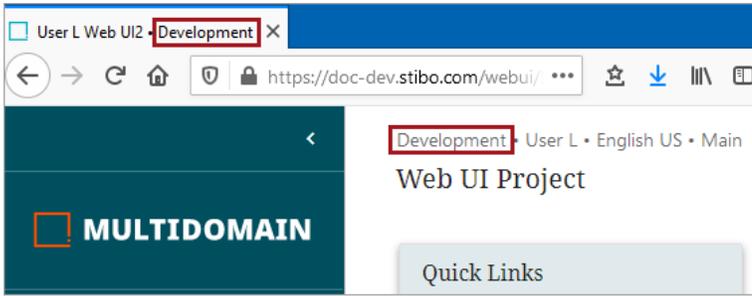

Thread Dump

This page contains information related to thread dumps in the system, accessed via the **Fetch data** button. However, interpretation of the results requires a deep understanding of Java and internal STEP code. Therefore, this tab is recommended for use only by Stibo Systems Technical Support and is not further described.

IDS Logging	Monitoring	Configuration	Thread Dump	Tools	Profiler	Healthcheck	Send Diagr	◀ ▶ ▾ ▶
-------------	------------	---------------	--------------------	-------	----------	-------------	------------	---------

▶ Fetch data

```
Thread[org.ops4j.pax.web.service.jetty.internal.LateInvalidatingHashSessionManager@19b2173fTimer,5,main]:
sun.misc.Unsafe.park (Unsafe.java:-2)
java.util.concurrent.locks.LockSupport.parkNanos (LockSupport.java:215)
java.util.concurrent.locks.AbstractQueuedSynchronizer$ConditionObject.awaitNanos (AbstractQueuedSynchronizer.java:2078)
java.util.concurrent.ScheduledThreadPoolExecutor$DelayedWorkQueue.take (ScheduledThreadPoolExecutor.java:1093)
java.util.concurrent.ScheduledThreadPoolExecutor$DelayedWorkQueue.take (ScheduledThreadPoolExecutor.java:809)
java.util.concurrent.ThreadPoolExecutor.getTask (ThreadPoolExecutor.java:1067)
java.util.concurrent.ThreadPoolExecutor.runWorker (ThreadPoolExecutor.java:1127)
java.util.concurrent.ThreadPoolExecutor$Worker.run (ThreadPoolExecutor.java:617)
java.lang.Thread.run (Thread.java:745)
```


Tools

The Tools tab contains tools for general use, as well as for Stibo Systems internal use only, divided into three sections. Each is described below, as appropriate for the intended use.



Business Rule Tracing

The functionality of the Business Rule Tracing section of the Tools tab is described within the interface itself. It is important to read the provided overview and to heed the advisement regarding filters and performance.

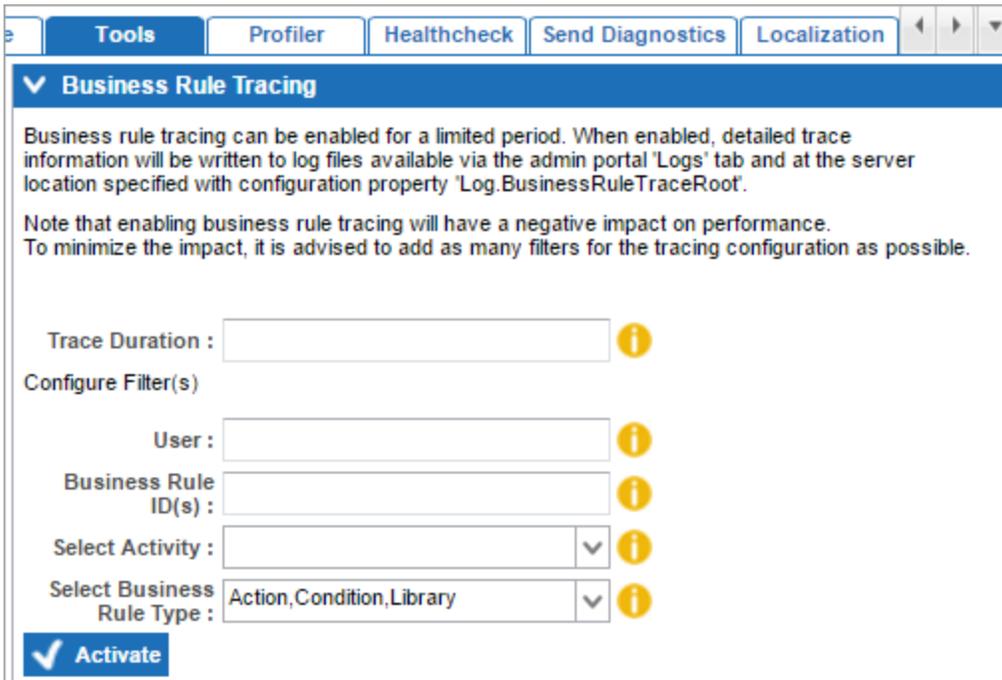

Click the yellow information icon next to each parameter for a complete description of the parameter / filter and any relevant information for populating it.

When the necessary information has been added, click the **Activate** button to begin tracing.

Note: Once tracing has been activated, the relevant business rule(s) must be triggered in STEP within the time frame defined in the Trace Duration parameter so that the rule is active for tracing. Furthermore, if the system is stopped or restarted, any tracing that was in progress will also be stopped.

Tracing will stop automatically when the specified duration has expired. Alternatively, users can click the **Stop** button (available only when tracing is in progress) at any time to kill the trace prior to completion of the duration.

▼ **Business Rule Tracing**

Business rule tracing can be enabled for a limited period. When enabled, detailed trace information will be written to log files available via the admin portal 'Logs' tab and at the server location specified with configuration property 'Log.BusinessRuleTraceRoot'.

Note that enabling business rule tracing will have a negative impact on performance. To minimize the impact, it is advised to add as many filters for the tracing configuration as possible.

Trace Duration : i

Configure Filter(s)

User : i

Business Rule ID(s) : i

Select Activity : i

Select Business Rule Type : i

✓ Activate
✗ Stop

Links

The Links section of the Tools tab provides links to two tools, each of which is described in detail below.

Tools

Profiler

Healthcheck

▲ Business Rule Tracing

▼ Links

[System software snapshot](#)

[Http Authentication Test Tool Servlet](#)

System Software Snapshot

Snapshots can be used to synchronize all of the software in one STEP installation with another STEP installation, so an identical clone can be made. Synchronizing from one STEP system to another is very useful, especially in cases where a problem found on one system needs to be reproduced on another or when an implementation has been tested on a QA server and is ready to move to a Production system. However, note that the database also needs to be synchronized (e.g., using STEP datapump or RMAN duplicate) to complete a full system clone. Further information about alignment of STEP databases using STEP datapump or RMAN duplicate can be obtained by contacting Stibo Systems Technical Support.

In normal operation, the Stibo Patch Operations Tool (SPOT) automatically uploads the latest snapshot to a Stibo Systems-specific email address when a system is patched or started, so this functionality is only needed if an additional snapshot is required locally (e.g., *not* for diagnostics by Stibo Systems), or if the system in question does not have access to the Stibo Systems updates server.


Clicking the **System software snapshot** link downloads an .spr file with the server name and date and time of the extraction included in the file name.

Http Authentication Test Tool Servlet

The **Http Authentication Test Tool Servlet** link is used to check whether or not the user logged into the admin portal is automatically authenticated, which makes it possible to test new or alternative SSO and LDAP configurations without affecting the running STEP system or its configurations. Complete documentation of this tool is included in the **STEP Authentication Guide** available in the **Miscellaneous** section of the **Technical Documentation**, available at [system]/sdk or from the Start Page.

Diagnostic Tools

The Diagnostic Tools section allows users to execute a Stibo Systems proprietary command and select a server (or all servers) on which it should be run.

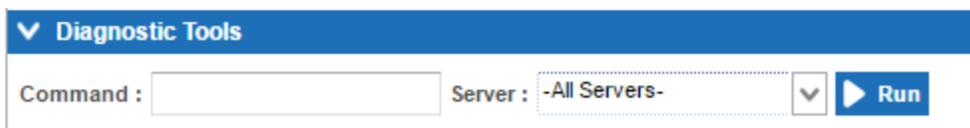


The screenshot shows a web interface for 'Diagnostic Tools'. It features a blue header with a dropdown arrow and the text 'Diagnostic Tools'. Below the header, there is a form with two input fields: 'Command : ' followed by an empty text box, and 'Server : ' followed by a dropdown menu showing '-All Servers-' and a small downward arrow. To the right of the dropdown menu is a blue button with a white play icon and the text 'Run'.

This tool is used primarily by Stibo Systems Technical Support and R&D groups for doing detailed inspections of the state of systems using the In-Memory component. If it is required for this to be run on a customer system, Stibo Systems will provide the specific commands to be executed. As this tool should only be used by or under the direction of Stibo Systems, the available commands are not made public.

Profiler

The Profiler tab is the primary tool used by Stibo Systems Technical Support and R&D groups to investigate performance issues as it provides visibility into what percent of time is spent executing various code paths in STEP. A variety of parameters can be entered and results are produced accordingly by clicking **Generate**.

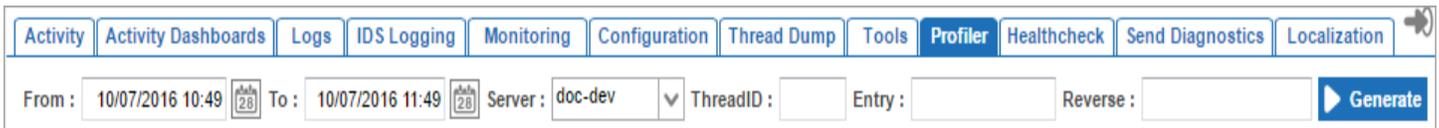

The screenshot shows the Profiler tool interface with the following elements:

- Navigation tabs: Activity, Activity Dashboards, Logs, IDS Logging, Monitoring, Configuration, Thread Dump, Tools, Profiler (selected), Healthcheck, Send Diagnostics, Localization.
- Search parameters:
 - From: 10/07/2016 10:49
 - To: 10/07/2016 11:49
 - Server: doc-dev
 - ThreadID: [empty]
 - Entry: [empty]
 - Reverse: [empty]
- Generate button: A blue button with a play icon and the text "Generate".

Determination of appropriate parameter values and interpretation of the results requires extensive knowledge of the STEP code base. Therefore, this tab is intended for use by Stibo Systems only and no further description is provided.

Healthcheck

The Healthcheck tab is intended to assist users on an ad hoc basis to identify and resolve system and performance issues. A set of standard tests are available, and Stibo Systems may add additional tests as needed. The upper portion of the screen allows users to select healthchecks to be run, while the lower portion provides results for the checks.

Note: Scheduled healthchecks and the statistics for previous automated healthchecks can be accessed via the Performance Analysis tools. For more information, refer to the Performance Analysis documentation.

Users can select the tests to be run and view a list of issues if any are found. In some cases, fixes are made available. As fixes should only be applied only under the direction of Stibo Systems, applying a fix requires a password that must be obtained from Stibo Systems Support. However, some issues identified may be solvable by administrators and the tool serves merely to bring them to light. In addition, it provides a way to aid Stibo Systems in resolving reported issues. If a system is having performance issues, administrators should run the available healthchecks and send them to Stibo Systems using the Send Diagnostics tool described in the Send Diagnostics topic.

Activity | Activity Dashboards | User Activity | Configuration | Thread Dump | Profiler | **Healthcheck**

The objective behind the Healthcheck functionality is, to visualize information which have not previously been accessible to customers and hence, give you as a customer the opportunity to intervene and rectify the current state before it potentially escalates to a real performance issue. Please note, that this functionality is designed to be run on a regular basis, which allows you to continuously monitor and thus avoid minor issues to evolve into more critical situation. Please find detailed information in the System Administration section of the online help / STEP Documentation.

Server time: 09/14/2022 09:51 -0400

Available Tests

<input type="checkbox"/> Test	Last Run	Execution Time (
<input type="checkbox"/> + Data Error		
<input type="checkbox"/> + Performance		
<input type="checkbox"/> + Configuration		

Logging | Monitoring | Configuration | Thread Dump | Tools | Profiler | **Healthcheck** | Send Diagnostics | Localization

Available Tests

<input type="checkbox"/> Test	Last Run	Execution Time (Last Ru	Executed By	Detected Problems
<input checked="" type="checkbox"/> Change Logs Entries Per Node	! Thu Oct 06 11:54:32 EDT : 23 sec		USER6	168
<input type="checkbox"/> Search for duplictaed edges	! Tue Oct 04 16:02:11 EDT : 21 sec		USER6	0
<input type="checkbox"/> Classification Missing a Revision	! Tue Oct 04 16:27:41 EDT : 0 sec		USER6	0
<input type="checkbox"/> Check for dual visible values	! Tue Oct 04 16:02:14 EDT : 0 sec		USER6	0
<input type="checkbox"/> Dual Visible Value 7 Extended Check	! Tue Oct 04 16:02:15 EDT : 1 sec		USER6	0
<input type="checkbox"/> Duplicate Contexts Extended Check	! Tue Oct 04 16:02:16 EDT : 0 sec		USER6	0
<input type="checkbox"/> Check for duplicate Contexts	! Tue Oct 04 16:02:16 EDT : 0 sec		USER6	0
<input type="checkbox"/> Duplicate Workspaces	! Tue Oct 04 16:02:16 EDT : 0 sec		USER6	0
<input checked="" type="checkbox"/> Duplicated Histories	! Thu Oct 06 12:27:37 EDT : 1 sec		USER6	12

Detected Problems

<input checked="" type="checkbox"/> Test	Object	Problem Type	Details	Fix Available	Fixed	Fix Applied By
<input checked="" type="checkbox"/> Change Logs Entries Per Node	Multiple (168)	Performance		No		
<input checked="" type="checkbox"/> Duplicated Histories	DTPConfiguration, Workspace: Approved	Search for duplicate entries in the history		No		
<input checked="" type="checkbox"/> Duplicated Histories	Inbound Data, Workspace: Main	Search for duplicate entries in the history		No		
<input checked="" type="checkbox"/> Duplicated Histories	AssetPush1, Workspace: Main	Search for duplicate entries in the history		No		
<input checked="" type="checkbox"/> Duplicated Histories	Change Attribute Link, Workspace: Staging	Search for duplicate entries in the history		No		
<input checked="" type="checkbox"/> Duplicated Histories	Change Attribute Link, Workspace: Main	Search for duplicate entries in the history		No		
<input checked="" type="checkbox"/> Duplicated Histories	DTPConfiguration, Workspace: Staging	Search for duplicate entries in the history		No		

Note: This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance. Use of this functionality on a clustered environment requires that the `Healthcheck.RootDir` configuration property be set to a shared path to ensure that the healthcheck reports are available, regardless of the application server node that the admin portal is accessed from.

Healthcheck

Healthcheck.RootDir= (not set)

- Using default value
- Must be an existing directory.

This property needs to be set if STEP is running on a clustered setup. This sets the root directory for storing healthcheck reports. If the adminportal is running on a clustered setup this should be set to a shared file system (like `/workarea/healthcheck`) to ensure that healthcheck reports are synchronized between cluster nodes. Otherwise we risk that healthcheck reports report false-positives in adminportal, since a fix can potentially be applied from another different app. server.

Running Healthchecks

A list of available checks to run on an as needed basis is populated in the upper half of the tab. Additional checks can be provided by Stibo Systems Support as needed, and new default checks may be added regularly. Clicking the yellow information icon available in the **Test** column provides a detailed description of each test, as well as considerations for running it.

For a list of all healthchecks, including both manually run and scheduled healthchecks, refer to the Healthcheck Test Index topic in the Performance Analysis documentation.

Important: Some checks may be time consuming to run and/or may impose a load on system resources when running. It is important to read the considerations provided in the yellow information icon prior to running any tests so that they can planned for accordingly.

To run healthchecks:

1. Use the row checkboxes to select one or more tests to be run. This enables the **Run Selected Tests** button.

Important: Do not run all checks at once. Review the details of the checks before running to limit degraded performance.

2. Click the **Run Selected Tests** button to begin execution of the selected test(s).
3. Watch for the **Last Run** field to update, indicating completion of the test.

4. View the **Detected Problems** column. A zero (0) value indicates no problems have been found. A non-zero value indicates the number of issues identified from the check.
5. Check the row box for any tests with problems to view results. Only the tests that are checked in the upper half of the screen will display results in the lower half so this can be used to filter large result sets.

Refer to the 'Healthcheck Results' section below for more information on the results of the tests and available actions.

Healthcheck Results

When a test has completed with one or more problems detected, the lower half of the screen displays one row for each detected problem (or set of problems) for the tests that are selected. In addition, healthcheck information is also stored on the application server at [STEPHOME]/diag/healthcheck (e.g., opt/stibo/step/diag/healthcheck), and is automatically included when a diagnostics package is sent to Stibo Systems Support. More information on sending diagnostics can be found in the Send Diagnostics topic.

Note: The upper and lower portions of the screen interact. To refer to results for any test in the lower half, the corresponding checkbox in the upper portion of the screen must be checked for that test. Therefore, this is also a means of filtering the result set if multiple tests have been run. To display results for only a single test, uncheck the other tests in the upper half of the screen.

Many detected problems are manually solvable by system administrators. Others may be common issues for which Stibo Systems has developed an automatic fix that can be applied. In these cases, the 'Fix Available' column displays 'Yes' and a yellow information icon displays that provides additional information about the available fix. Automatic fixes should be applied with care and only under the direction of Stibo Systems. Therefore, a password is required to access automatic fixes. Additionally, some problems may require the assistance of Stibo Systems to resolve manually. In any case where administrators cannot resolve the identified issues, contact Stibo Systems Support for assistance. Note that for any cases where assistance is required, it is important that a diagnostics package be sent to Stibo Systems with the request so that all information to aid in resolution of the issue is made readily available.

Actions can be taken on the detected problems, which are applied only to the row(s) selected via the row checkboxes. The available actions are:

- **Export Selected Items to CSV:** Exports the selected results to a CSV file. Many detected problems can be manually corrected by administrators, which can be facilitated by providing an export of the result set to work from.
- **View Fix Log:** If an automatic fix for a particular problem has been applied, this displays a pop-up with information about the fix. This button is only enabled when a single result is selected for which a fix has already been applied.

- Fix Selected Issues:** This button is only enabled when all selected rows have fixes available. Note that information about the fix is available by clicking the yellow information icon (available in the 'Fix Available' column whenever it is populated with 'Yes'). Clicking the 'Fix Selected Issues' button opens a dialog with a password field as automatic fixes should be applied only with the guidance of Stibo Systems Support. To request a password, contact Stibo Systems Support. When a password has been obtained and accepted in the dialog, fixes will be attempted for all selected rows.

When taking action on the selected results, it is important to be aware of how the results are displayed. Some tests are able to report a series of nodes individually for results, while others are only able to report a count (without individual nodes). These are referred to as Result Type of 'Node' or 'Group,' respectively. Some problems have fixes available, while others do not. When fixes are available, sometimes they can be applied to nodes individually, while other times they can only be applied to the full problem set at once. Furthermore, for usability, result sets over 50 are grouped in the results interface, but details on individual nodes can be accessed via export if the result type supports it. Therefore, it may be possible in some cases to examine individual results only in an export, or to take action only on a group, even when individual results are available via export. The below table outlines the behavior of the display and the available actions.

Result Type	Result Size	Fix Available	Display	Export
Node	< 50	No	Nodes	Nodes
Node	> 50	No	Group	Nodes
Node	< 50	Group	Group	Nodes
Node	> 50	Group	Group	Nodes
Node	< 50	Individual	Nodes	Nodes
Node	> 50	Individual, but fixes in this category will always be implemented as a group as individual nodes are not selectable	Group	Nodes
Group	N/A	No	Group	Group
Group	N/A	Group	Group	Group

Each column in the results table is described below:

- **Test:** The name of the test that identified the problem. The results table can be filtered using the checkboxes in the upper portion of the screen (only those checked will display results).
- **Object:** The ID of the object in the database for which the problem was detected, and other identifying information if applicable (e.g., Workspace).
- **Problem Type:** Description of the type of problem discovered.
- **Details:** Displays samples and approximate timestamps.
- **Fix Available:** Displays 'Yes' or 'No,' indicating whether or not a fix is available. If a fix is available, a yellow information icon is present that can be clicked to display a description of the fix, which can then be executed by checking the applicable result row and clicking the **Fix Selected Issues** button and providing an appropriate password, as described above.
- **Fixed:** Displays date and time the fix was completed, when applicable.
- **Fix Applied By:** Displays the user who executed the fix, when applicable.

Send Diagnostics

The Send Diagnostics tab allows users to send system information to Stibo Systems. As this information is often necessary for Stibo Systems to assist in troubleshooting and support situations, it is a convenient way to send all necessary data without having to find the individual files on the application server(s).

Important: Anytime an issue is sent to Stibo Systems Support regarding general system troubleshooting, performance issues, or for assistance resolving problems detected via healthchecks, a diagnostics package should also be sent to Stibo Systems to ensure that the proper information is captured and reported at the time when the issue is occurring.

Send diagnostics information to Stibo Systems

Log files, System information and Healthcheck data are automatically included in the diagnostics sent back to Stibo

Server : All Servers

Include Profiling/Heapdump Data

Include Profiling Data

Include Heapdumps

Select Date Range

From :

To :

Up to now

Issue Key :

* Note dates are set using server time

Some of the healthcheck results are older than 1 month. They have been run on Tue Apr 24 02:23:25 GMT-400 2018

Log files, system information, and healthcheck data are always included in the diagnostic package if available. Profiling and heapdump data can be quite large and are therefore not included by default. However, these can be selected for inclusion using the **Include Profiling Data** and **Include Heapdumps** checkboxes.

The **From** and **To** fields specify the interval for which the diagnostic data should be sent. It defaults to one hour prior to the current time, which is generally a good interval to use. Care should be taking in not selecting an excessively large interval due to the amount of data that would be sent.

The **Issue Key** field is optional and can be used to specify a Stibo Systems Service Portal issue that the diagnostic data is relevant for by typing an exact match to an existing Stibo Systems Service Portal issue. This is only applicable for systems with a connection to the STEP updates server and does not attach any diagnostics data to the specified issue. Instead, it essentially provides tracking for packages sent directly to Stibo Systems so they can be quickly associated with a relevant Stibo Systems Service Portal issue.

To send diagnostics to Stibo Systems, make the appropriate selections in the available parameters and click **Send Diagnostics**. For systems with a connection to the STEP updates server, this will send the information directly to Stibo Systems. Systems without a connection to the STEP updates server will receive a message that the file has been generated and a link to **Download diagnostics output file** will be available. The downloaded file can then be attached to the relevant Stibo Systems Service Portal issue.

Localization

The Localization tab provides a tool to support the translation of static text strings in the STEP user interfaces (the workbench and Web UI), such as titles, labels, and dialog text. The tool enables administrators to generate a translation file that contains the texts that need translation. Translation files are in XML format and are intended to be sent to an outside agency for translation of the text strings in the file. Once the file is returned from the translation agency, it can be converted into system resource files that can be applied to the system so that users may view the STEP interfaces in the translated language(s).

This document is not intended to act as a standalone set of instructions for implementation of UI localization. Instead, it is strictly a guide to some basic localization concepts and instructions for using the localization tool.

Note: The locale of the STEP Start Page can be modified via the 'Webstart.I18NLanguage' configuration property in the Self-Service UI (SSUI). For more information, refer to the Self-Service UI topic.

Localization Frameworks

STEP has both a key-based and an annotation-based framework for localization.

Key-based framework for Web UI

This section describes the legacy way of localizing static text strings in the Web UI. The framework for this is based on using localization keys as opposed to the annotation-based framework.

A localization key (sometimes referred to as 'i18n' keys) is basically a value-pair. The key ID always starts with 'i18n' and the value is the actual text string that will be presented in the Web UI (Portal).

For example, `i18n.stibo.portal.server.components.value.ApproveActionServerComponent.default.button.Label` = Save & Approve

In the above example, the localization key ID is

'`i18n.stibo.portal.server.components.value.ApproveActionServerComponent.default.button.Label`' and the value 'Save & Approve' is the text string that displays to the end user in Web UI.

The localization keys are stored in resource files that can either be part of the Web UI code or be placed on the file system on the application server. On a given STEP system, you will be able to examine the list of localization keys via this URL: `[system name]/webui/docs`

For example, `http://mysystem.acme.corp/webui/docs`

This will provide a web page with descriptions of the portal components available on the given system as well as a list of localization keys and values shown at the bottom.

In the Web UI designer tool displays the localization key used for a specific text.

Properties

Configuration Web UI style

Item family detail ▼ Save Close New... Delete Rename Save as...

Approve Action Properties [go to parent](#)

Component Description Generates pushbuttons (Approve button) for the currently selected node

Button Label i18n.stibo.portal.server.components.value.ApproveActionServerComponent.default.button.Label

Button Type TEXT ▼

Enforce Validity

The above example shows the Approve Action properties in the Web UI designer. The label on the button is defined by the localization key 'i18n.stibo.portal.server.components.value.ApproveActionServerComponent.default.button.Label.' The default English value for that localization key is 'Save & Approve' and the button will be rendered like this for the English locale:



Note: The following functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.

In some cases you may want to overwrite the standard value for a localization key, thus changing the default text. This requires that you add the given translation key with the new value to a 'portalmessages' property file and place that file on the application server. The file can be placed on the file system in any directory as long as the directory is pointed out in the `Portal.Localizer.Folder` configuration property.

For example, `Portal.Localizer.Folder = [STEPHOME]/PortalLocales` (e.g., `opt/stibo/step/PortalLocales`)

Note: The naming convention for the 'portalmessages' file is: `portalmessages_[ISO country code].properties`. Example: `portalmessages_en.properties`. Also, region codes can be added as a postfix to the country code. Example: `portalmessages_en_US.properties`

For instance if you want to change the English default text on the SaveApproveButton to 'Verified', the following will have to be in place:

- A directory on the application server has been appointed to house the 'portalmessages' property files.
- The `Portal.Localizer.Folder` property points out the above mentioned directory.
- A 'portalmessages' property file for English is placed in the directory. The file must be named 'portalmessages_en.properties.'
- The 'portalmessages_en.properties' file must include the translation key for the SaveApproveButton and it must specify the new English text:
`i18n.stibo.portal.server.components.value.ApproveActionServerComponent.default.button.Label = Verified`

Localizing text for React-based components

When localizing Web UI components developed using the React JavaScript library (e.g., ui-basket, ui-search, pdx, cmdm), some additional steps must be taken to ensure the translation is successful.

After extracting the translation resource files, additional folders containing json property files will display under the translation resource folders. As an example, we will use the ui-search component. Files like the ones shown in the screenshot below will display at this location: `/workarea/localization/com.stibo.ui.search/localization`


Name	Date modified
ui-search	3/18/2022 1:31 PM
messages_tr	3/18/2022 7:24 AM
messages_tr_TR	3/18/2022 7:24 AM

Inside the 'ui-search' folder, a .json property file will display. If the json property file follows a naming convention like this example, "translations.[2-letter country code]_[two letter language code].json", as in "translations.fr_FR", then the following steps must be taken:

1. Duplicate the .json property file.
2. Rename it and remove the underscore and the two-letter all-caps language code so it displays as "translations.fr". There will be two .json property files in the folder.
3. Copy the entire "ui-search" folder to the "Portal" folder location.
4. The translation now works on the Web UI.

Additionally, if the .json file in the 'ui-search' folder (continuing with this example) is named like this example, "translations.fr.json", then the following steps must be taken:

1. Copy the entire "ui-search" folder displaying under the "com.stibo.ui.basket" folder.
2. Place this folder under the path that is defined in configuration property `Portal.Localizer.Folder`. For example, if the property is set to point to the path, /workarea/localization/Portal, then this folder has to be copied to this location as well, as shown in the screenshot below:

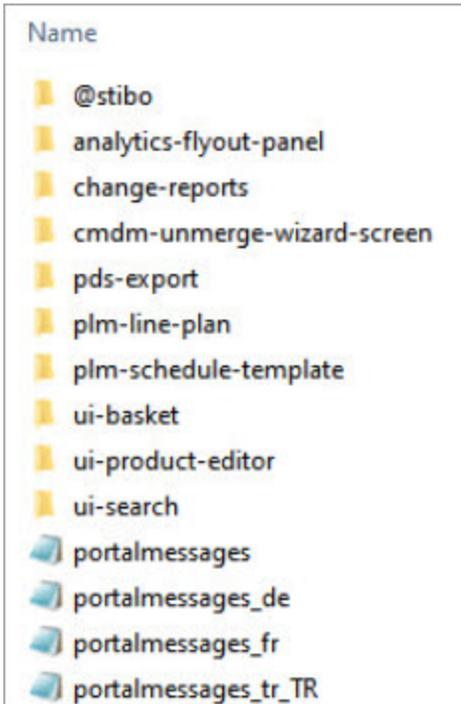

Key-based framework for STEP Workbench

Localization of texts in STEP Workbench is based on a 'GUI bundle' system. A GUI bundle is a java.properties file which maps localization keys to text strings to be used in the UI. The developer provides a default English text in a file called 'something.properties.' Translations to other languages exist as files called 'something_language.properties.' The code retrieves the texts based on the keys and the framework takes care of first looking up the translated text in the 'something_language.properties' file and then in the 'something.properties' file. All the properties files involved are included in the jar files that make up the application and cannot be changed by the users.

Annotation-based localization framework

The localization framework offers a bundle-based approach to localization of STEP code. Basically it means that user facing static text strings must be annotated as localizable in the code and a default (English) text is provided. This is valid for both STEP Workbench and Web UI.

A class annotated with `@Localizable` represents a string that can be localized with a Localizer. The annotated class makes up the ID of the string. The annotation contains the default source translation (in English).

The bundle translations can be overridden by custom translations placed as configuration properties. The STEP server is configured to look for localizable artifacts by setting the configuration property

`Install.ExternalLocalizationDir` to point to the folder where the files are stored. This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.

Localization Tool

The Localization tool supports system administrators in the process localization, using either the annotation-based localization, or key-based annotation in Web UI.

Important: The localization tool does not support key-based localization in STEP Workbench.

For more information on annotation-based localization or key-based annotation in Web UI, refer to the Localization topic.

The localization tool assists administrators in translating static text strings in the UI, such as titles, labels, and dialog text as it generates a translation file that contains the texts that need translation. These generated files are in XML format and are intended to be sent to an outside agency for translation of the text strings in the file. Once the file is returned from the translation agency, it can be converted into system resource files that can be applied to the system so that users may view the STEP interfaces in the translated language(s).

The Localization tool is intended to be used by system administrators only, and the involvement of a Stibo Systems developer or partner may be required as part of the initial implementation of the functionality.

Note: The locale of the STEP Start Page can be modified via the 'Webstart.I18NLanguage' configuration property in the Self-Service UI (SSUI). For more information, refer to the Self-Service UI topic.

Overview of the Tool

The Localization tab is split into two functional areas: file generation and file conversion.

IDS Logging | Monitoring | Configuration | Thread Dump | Tools | Profiler | Healthcheck | Send Diagnostics | Localization

Generate translation file

Target language : Country : Translated Not translated Changed

Name	Translated	Not translated	Changed
<input checked="" type="checkbox"/> <input type="checkbox"/> addressmanagement			
<input checked="" type="checkbox"/> <input type="checkbox"/> asset-importer			
<input checked="" type="checkbox"/> <input type="checkbox"/> autotclassification			
<input checked="" type="checkbox"/> <input type="checkbox"/> basicportalcomponents			
<input checked="" type="checkbox"/> <input type="checkbox"/> completeness-score			
<input checked="" type="checkbox"/> <input type="checkbox"/> conditional-validity			

Convert to translation resource files

Here you can submit the translated xml file in order to generate a zip file containing the resource files divided per bundle. The content of the zip file must be applied to the corresponding bundles or placed on the STEP server.

Translation file : No file chosen

Merge with existing translations from STEP :

Convert to one Portal message file per bundle :

Generate Translation File

The Localization tool is able to extract both the localization keys (often referred to as 'i18n keys') used by Web UIs, as well as the text strings in the code base that are annotated as localizable. The latter is used by both Web UIs and STEP Workbench. In order to generate the translation file, the system administrator must first select the data to be included.

Generate translation file

Target language : Country : Translated Not translated Changed

Target Language

The target language the file should be generated for must be specified. The selected target language is added to the XML translation file so that the language indicator is available to the system when the translated file is returned.

Country


For some languages it is possible to specify a country version of the language. Country should only be specified if the translation is specific to a particular regional dialect.

Translation Status

Translation status selections may be made to reduce the size of the translation XML file, if desired. This is especially useful on previously translated systems where only untranslated and/or changed (delta) content in the selected language should be submitted for translation.

- Translated: All text that has been previously translated into the target language by the Localization tool
- Not translated: All text that has never been translated into the selected target language by the Localization tool
- Changed: All text that has already been translated into the selected target language by the Localization tool, but has since had the default English texts updated

Once the administrator has made the appropriate filtering selections, they must click **Search** to generate the list of bundles and translation status.

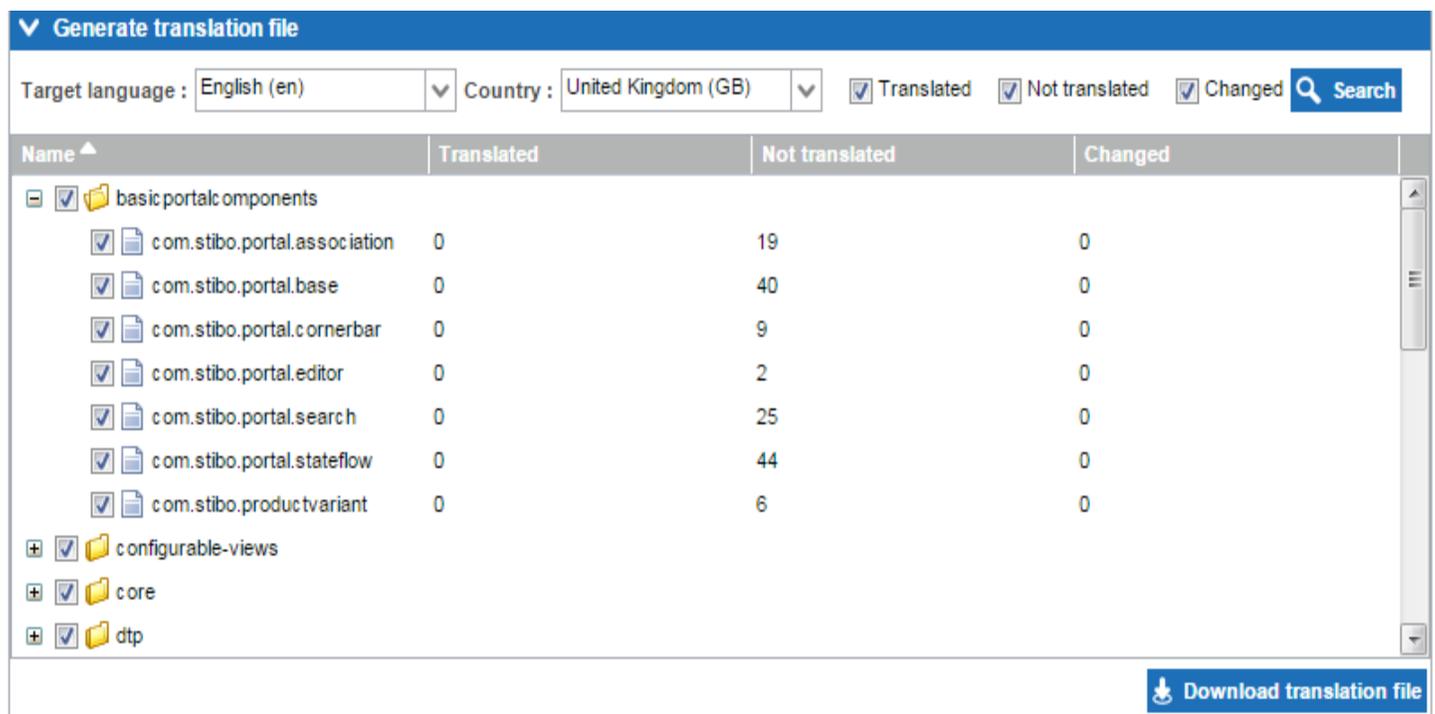

The screenshot shows the 'Generate translation file' interface. At the top, there are dropdown menus for 'Target language' (English (en)) and 'Country' (United Kingdom (GB)). There are three checkboxes for filtering: 'Translated' (checked), 'Not translated' (checked), and 'Changed' (checked). A 'Search' button is located to the right of these checkboxes. Below the filters is a table with the following columns: 'Name', 'Translated', 'Not translated', and 'Changed'. The table lists several bundles under the 'basic portal components' folder, including 'com.stibo.portal.association', 'com.stibo.portal.base', 'com.stibo.portal.cornerbar', 'com.stibo.portal.editor', 'com.stibo.portal.search', 'com.stibo.portal.stateflow', and 'com.stibo.productvariant'. There are also folders for 'configurable-views', 'core', and 'dtp'. A 'Download translation file' button is located at the bottom right of the interface.

Name	Translated	Not translated	Changed
basic portal components			
com.stibo.portal.association	0	19	0
com.stibo.portal.base	0	40	0
com.stibo.portal.cornerbar	0	9	0
com.stibo.portal.editor	0	2	0
com.stibo.portal.search	0	25	0
com.stibo.portal.stateflow	0	44	0
com.stibo.productvariant	0	6	0
configurable-views			
core			
dtp			

The data to be extracted can be further refined by selection / deselection of the particular component bundles to be included. Administrators may select all (as is defaulted) or may select only a subset for extraction. In the latter case, a Stibo Systems developer should be consulted to ensure that the correct bundles are extracted to meet the translation requirements. One example could be that only the texts related to matching should be translated, thus only the bundle related to matching needs to be selected.

Once all file generation selections have been made, the administrator clicks **Download translation file**. The file can then be submitted to a translation agency.


Convert Translation File

When a generated file has been translated, the conversion functionality in the localization tool must be used to convert the XML file into a system resource file.

First, the administrator must select the translated XML file from their local machine using the **Choose File** button.

The **Merge with existing translations from STEP** option may be checked if the resource files are intended to replace only a small subset of existing translations on the system.

The **Convert to one Portal message file per bundle** selection applies to Web UIs only. Check this option if the generated resource files will be placed on the STEP application server. This option should be left unchecked if the resource files should be placed within the code.

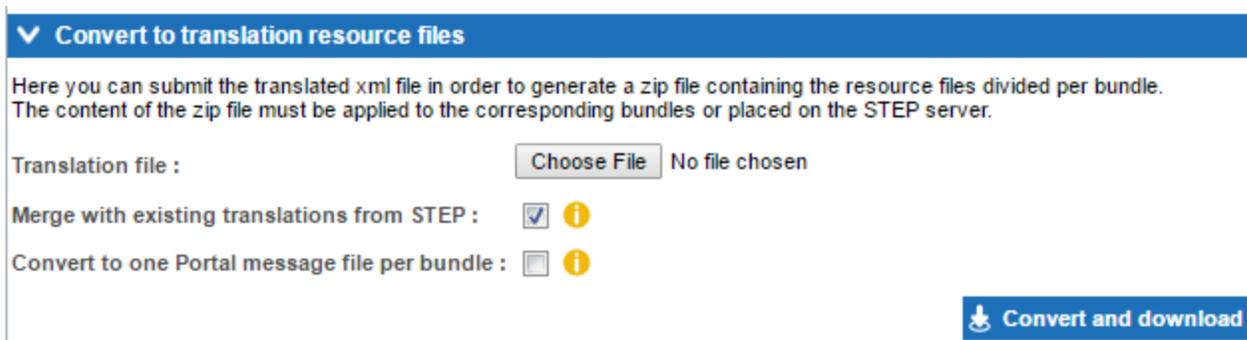

Convert to translation resource files

Here you can submit the translated xml file in order to generate a zip file containing the resource files divided per bundle. The content of the zip file must be applied to the corresponding bundles or placed on the STEP server.

Translation file : No file chosen

Merge with existing translations from STEP : ⓘ

Convert to one Portal message file per bundle : ⓘ

When the translation file and any additional options have been selected, the **Convert and download** button should be clicked to generate the resource files.

Deploying the Resource Files

The resource files are delivered in a zipped file which contains a number of folders that are structured and named in a way that the STEP installation will be able to recognize. The entire file structure that is included in the zipped file must be added to the STEP installation.

Converted files may be delivered to STEP via addition to the code base or via placement on the application server.

Addition to the code base requires a Stibo Systems developer and is typically used when the translations are to be used as part of the standard STEP distribution.

Placement of the files on the STEP application server can be done by any STEP administrator with access to the application server. This option is typically used when the core translations of texts must be overwritten using the newly generated resource file content. This functionality is managed by a configuration property that is not available in the Self-Service UI. Contact Stibo Systems Support for assistance. This option requires you to populate the `Install.ExternalLocalizationDir` configuration property with the path of the folder on the server in which the localization files are stored. One file per locale per bundle may be stored in this location.

Properties To Be Set

Note: The following functionality is managed by configuration properties that are not available in the Self-Service UI. Contact Stibo Systems Support for assistance.

For the workbench and the Web UI, the following configuration properties must be set:

For the workbench: `Install.ExternalLocalizationDir=/workarea/localization`


For the Web UI: `Portal.Localizer.Folder= [STEPHOME]/PortalLocales`

In the Self-Service UI, select an environment and click the 'Configuration properties' tab to view the **Webstart.Locales** property. The locales and their Start Page translations are supplied in the following format: `[locale1]:[start page text]; [locale2]:[start page text]`. Allow a few minutes for changes made in the Self-Service UI 'Configuration properties' tab to display.

For example:

Key	Value	Actions
Webstart.Locales	da_DK:STEP workbench (Danish);en_EN: STEP workbench (English)	 

This configuration provides the following options on the Start Page.

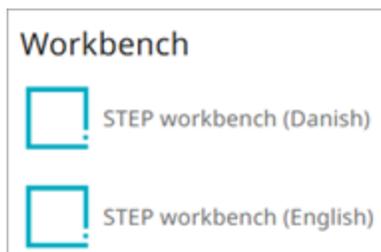

Assuming that corresponding resource files are available, users logging in via one of these links will view a Danish- or English-translated workbench.

Stibo Systems can provide translations of STEP Workbench and Web UI for the following languages:

- Chinese (simplified)
- Danish
- English
- German
- Italian
- Japanese
- Portuguese
- Spanish
- Swedish

- Finnish
- Korean
- French
- Norwegian

Limitations

- The localization tool can only be used to translate text into standard STEP languages (those supported server side, such as French, German, etc.)
- Only text strings that are annotated as localizable or have a translation key (used by Web UIs) can be extracted by the localization tool
- Data content in STEP is not influenced by the localization tool
- Workflow state names and events as well as business rule messages are not localizable using the same XML translation file-based process. For more on how to translate workflow state names and events, refer to the 'Advanced Workflow Topics' section of the Localizing Workflow State Names and Events topic in the Workflows documentation. For more on translating business rule messages, refer to the Localized Messages for JavaScript Business Rules topic in the Business Rules documentation.

End User Access of Translated STEP Workbench UIs

Translated workbenches are accessed via the appropriate Start Page links. The available Start Page links are defined by the **Webstart.Locales** property that can be specified in the Self-Service UI.

Key	Value	Actions
Webstart.Locales	da:STEP workbench (Danish);fr:STEP workbench (French);sp:STEP workbench (Spanish);en:STEP workbench (English)	 

This configuration provides the following options on the Start Page.

Workbench

STEP workbench (Danish)

STEP workbench (English)

STEP workbench (French)

STEP workbench (Spanish)

Setup and User Access of Translated Web UIs

Translated Web UIs can be accessed in one of two ways: via the Locale selector on the login page, or once logged into Web UI, going to the Select Locale section in the User Settings menu on the Global Navigation Panel. There are thirteen locales that come standard with each Web UI: Danish, German, English, Spanish, French, Italian, Norwegian, Portuguese, Finnish, Swedish, Chinese (simplified), Japanese, and Korean. Both locale access options are described in further detail below.

For more information on Localization or using the Localization Tool, refer to the Localization topic and the Localization Tool topic in this Administration Portal documentation.

Note: You can ensure a specific locale displays even if the browser prefers a different language. For example, to force display of the English locale, the `WebUI.OverrideBrowserPreferredLocale=en` configuration property can be set. Setting the locale via the Login Screen's Locale selector or the Global Navigation Panel will overrule this property. This configuration property is not available in the Self-Service UI. Contact Stibo Systems Support for assistance.

If only a select few locales need to be shown, the **Locale Global Representation** component can be configured to limit the available locales on the Web UI Login Screen and on the Select Locale section of the User Settings menu on the Global Navigation Panel. To do so, follow the directions outlined below:

1. Log into Web UI.
2. Go to --[MAIN]-- > Global Representation > and add the **Locale Global Representation** component.
3. Once added, double click on **Locale Global Representation** component to open the Locale Global

Representation Properties.

4. Add the desired locales from the dropdown list, and click **Save**.

Edit component

Locale Global Representation Properties

Component Description

With this component, admin users can determine which locales are available to end users for selection on the Login Page and in the "Select Locale" section of the "User Settings" menu in the "Global Navigation Panel". Select from a dropdown list the desired locales to display. All locales will be shown if the "Locale Global Representation" component is not configured. The "Select Locale" menu and Login Page dropdown will not show if the component is added, but no locales are selected.

Locales

Danish

English (United States)

Spanish

French

Italian

Danish

German

English (United Kingdom)

English (United States)

Spanish

Finnish

French

Italian

Japanese

Korean

Norwegian

Portuguese

Swedish

Chinese

Important: If the Locale Global Representation component is added, but no locales are added to the component, the system will not display the Locale dropdown on the Login Screen, and it will not display any locales on the Select Locale section of the User Settings menu in the Global Navigation Panel. If the Locale Global Representation component is not added, all thirteen locales will display.

Backward Compatibility

For backward compatibility in older STEP systems, the Locale Selector child component on the Login Screen will remain ONLY if it was configured prior to 10.3, and will behave in the following ways:

- If the Locale Selector child component and the Locale Global Representation component are **BOTH** added, the Locale Global Representation component and its behaviors will take precedence.
- If the Locale Selector child component is added and configured, but the Global Representation component is **NOT** added, then the Locale dropdown on the login screen will display the configured locales, but the Select Locale section of the User Settings menu in the Global Navigation Panel will display all thirteen locales.
- If the Locale Selector child component is selected but no locale values have been configured, and the Locale Global Representation is **NOT** added, then both the Locale dropdown on the login page and the Select Locale section of the User Settings menu in the Global Navigation Panel will display all thirteen locales.

Properties

Configuration Web UI style

---[LOGIN]---

Save Close New... Delete Rename Save as...

Login Screen Properties

Component Description The "login" area for the vendor Web UI - the fixed screenid "login" in configuration files always maps to a component of this type. There are legacy support for the "loginscreen" xml tag in the configuration file.

Disclaimer


Web UI Title

Child Components

Locale Selector Login Locale Selector [go to component](#)

Login Screen Dropdown Locale

To select a particular locale on the Login Screen, select the dropdown menu from the Locale parameter and enter in user login credentials. Click **Login**.

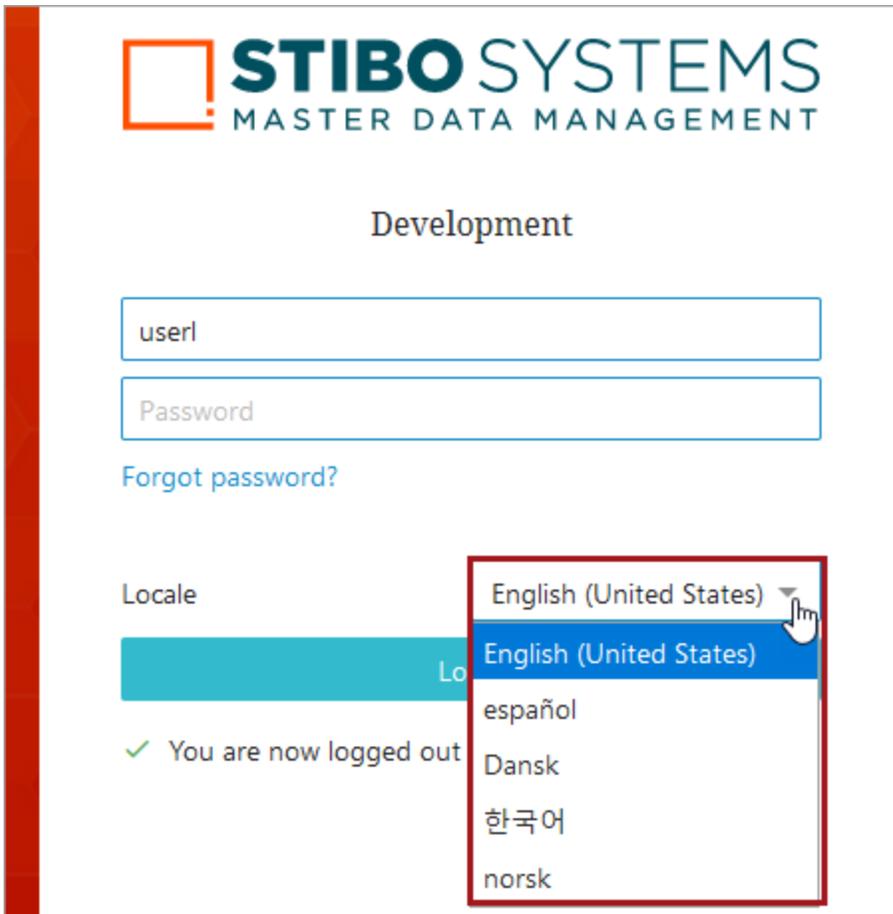

Select Locale via the Global Navigation Panel

Users are able to select locale through the Global Navigation Panel. This way of selecting locale enables users who normally bypass the Web UI login screen, such as for systems configured with Single Sign On (SSO), to select a locale different from the browser's preferred language. The selected locale will be highlighted, and each time a new locale is selected, the Web UI will refresh, signaling that the new locale has taken effect.

The locale selection under the Select Locale section of the User Settings menu in the Global Navigation Panel will display all thirteen translations as options, unless otherwise configured in the Web UI designer to only display a select few.

To access the locale selection in the Web UI, follow the directions below:

1. In Web UI, go to the Global Navigation Panel.
2. Click on User Settings.
3. Scrolling down to the Select Locale section of the User Settings column and select the desired locale.

Select Locale

- Dansk
- Deutsch
- English (United Kingdom)
- English (United States)**
- español
- français
- italiano
- norsk
-  portugês
-  suomi
-  svenska
- 中文
-  日本語
- 한국어